



बड़ौदा यू.पी.बैंक
Baroda U.P. Bank

SHORT TERM TENDER NOTICE

(For Empanelled Furnishers & Interior Decorators only)

INTERIOR DECORATION WORK IN ANAND NAGAR BRANCH OF BARODA U.P. BANK REGIONAL OFFICE-ETAWAH

IMPORTANT DATES

DATE OF ISSUE OF TENDER NOTICE	30.07.2022
LAST DATE AND TIME OF SUBMISSION OF TENDER	20.08.2022 up to 04:00 P.M.
DATE OF OPENING OF TENDER (FINANCIAL BID)	22.08.2022 at 03:00 P.M.

Baroda U.P. Bank
Regional office Etawah
Pakka Bag Tiraha, Etawah
206001 (U.P.)

Regional Manager

Date: 30.07.2022

NOTICE INVITING TENDER

Sealed item rate short term tenders are invited on behalf of the Regional Manager, Baroda U.P. Bank, Regional office Etawah, from the Furnishers & Interior Decorators having valid Empanelment with the Baroda U.P. Bank for the work of INTERIOR DECORATION WORK IN ANAND NAGAR BRANCH OF BARODA U.P. BANK, Regional Office Etawah.

1. Issue of tender documents : 30/07/2022 to 20/08/2022
2. Last date of receipt of tender documents : 20/08/2022 upto 04.00 PM
3. Date of opening of tender documents : 22/08/2022 at 03.00 PM
4. Place of submission & opening of tender : Baroda U.P. Bank, REGIONAL OFFICE, Eatwah
5. Period for completion of work from order date : Maximum 30 days
6. Retention percentage : 10% (Ten percent) from final bill
7. Defect liability period : 12 months from the date of completion certificate issued by the Bank Architect.
8. Release of retention money : After 14 days from defect liability period.

Handwritten signature and initials in blue ink.

SUBMISSION OF TENDER

The tenders are to be submitted in a sealed envelope and clearly super scribed as "Tender for FURNISHING & INTERIOR DECORATION WORK IN ANAND NAGAR BRANCH OF BARODA U.P. BANK, REGIONAL OFFICE, ETAWAH.

- Bids must be submitted through hand to hand or registered Post only.
- The bid must contain two Envelopes as per procedure given below

FIRST ENVELOPE MUST CONTAIN ALL THE DOCUMENTS GIVEN BELOW:

1. Photo copy of PAN Number duly attested.
 2. Photo copy of GST Number duly attested.
 3. Registration certificate of both work i.e. 'furniture & fixture work' and 'Electric & data cabling work
 4. All the documents should be self attested along with stamp of the Firm.
- IT MUST BE MENTIONED ON ENVELOPE "DOCUMENT SUBMITTED FOR BID OF FURNISHING & INTERIOR DECORATION WORK IN ANAND NAGAR BRANCH".

SECOND ENVELOPE MUST CONTAIN ALL THE DOCUMENTS GIVEN BELOW:


SECOND ENVELOPE MUST CONTAIN only bid and nothing else.

- The price must be submitted on the prescribed format
- Price bid will not be accepted on any other format or document.
- It must be clearly mentioned "PRICE BID OF FURNISHING & INTERIOR DECORATION WORK IN ANAND NAGAR BRANCH".

BOTH TWO ENVELOPES MUST BE KEPT IN THIRD SEALED ENVELOPE AND SUPERSCRIBED "BID FURNISHING & INTERIOR DECORATION WORK IN ANAND NAGAR BRANCH".

GENERAL INSTRUCTIONS TO TENDERERS

1. The term "Contractor" shall mean the successful tenderer to whom the Contract shall be awarded.
2. The Contractor should quote the rates in figures and words. Any corrections or Over-writing should be initialed by the Contractor.
3. The Contractor should submit the tenders with seal, signature and date on each Page.
4. The Contractors should submit the cost of the main items as per tender specifications. Further modification after awarding of the contract shall be not allowed unless there is specific instruction by the Bank/Architect to change specifications.
5. The contract is time-bound and the works are to be completed within the time limit specified in the notice inviting tenders. This is a working office and the contractor has to work with no or minimum obstruction to its regular services.
6. The decision of Employer and the Architect is final and binding.
7. The contractor must submit registration certificate of both work i.e. 'furniture & fixture work' and 'Electric & data cabling work' in separates envelope must be mention "Technical Bid for furnishing & electrical work".
8. The contractor must submit the tender for both work i.e. 'furniture & fixture work' and 'Electric & data cabling work', partially filled tender will be rejected.
9. **For Electrical fixtures and light points required as per drawings the contractor has to draw the wires from the existing positions of light points, power points wherever and if applicable. The contractor shall submit the certificate from electrical contractor holding required license/certification from directorate of electrical safety (U.P.)/competent authority of any other State.**



TERMS & CONDITIONS

1. Unless otherwise mentioned, all works are with no allowance for Lapse waste. Unless otherwise described or measured separately, price for all the items shall include all necessary straight & curved edges.
2. Any damage to the work before the site is handed over, is to be replaced or made good at the expense of the contractor to the entire satisfaction of the Architect/Bank.
3. Income Tax, Other Tax as applicable shall be deducted at source as per the Income Tax Act / Rules.
4. The quantities indicated are subject to change. The payment of the bill shall be made as per the actual measurement as certified by the architect but not exceeding the total value quoted in the tender form.
5. The Architect or any officer of the Employers will be free to inspect the work at the site during the period of execution. Any suggestion of change or modification to improve the quality of work will be carried out subject to prior approval of the competent authority of the employers and that of the Architect.
6. In case of failure to take up the work even after accepting the work order, or leaving the work incomplete, or for defective work not rectified, or violation of the terms and conditions, the contractor will be de-paneled/blacklisted.
7. For any item of work not covered or any unforeseen items of work, payment will be made according to the rates approved for similar nature of work, the costing done by the Architect, as per current PWD schedule of rates, or as per analysis of material cost, labour rate and profit to the Contractor at 10%. The Contractor must obtain prior approval in writing before undertaking such additional works.
8. The tenderers shall sign each & every page of the tender documents including the drawings attached here to.
9. The amount is to be quoted in figures as well as in words. In case the rates quoted in words and in figures are in variance, the amount written in words shall be taken as final.
10. The Contractor shall make their own arrangement at their own cost for storing materials, plants, tools etc. The employers will not be liable for security of the Contractor's materials.
11. No tools or plants will be issued by the bank.
12. The Employer / Architect reserves the right to accept or reject any tender without assigning any reason whatsoever and the said decision shall be final and binding upon the tenderer.
13. In case of breach of contract by the Contractor for slow progress of works or any other claim of damage, the Employer or the Architect may have the power to rescind the contract without furnishing further reasons thereof.
14. The Architect shall have the power to ask the contractor to furnish the sample/ color / test certificate from any Govt. / Authorized agent for any materials used/ to be used in the Works, the expenditure of which is to be borne by the Contractor.
15. The Employer shall not be liable for any damages or compensation payable as a consequence of any accident or injury to any workman or other persons in the employment of the Contractor or any sub-contractor.
16. On completion of the Works, all rubbish, debris, materials, tools, Laborers, etc. to be removed by the contractor from the site and the contractor will hand over the site clean & clear & in usable condition within 3 days of completion of the works. Failing this, the employer may
17. Dispose the materials at the cost of the contractor

[Handwritten signature] 4 *[Handwritten signature]*

18. In case of any dispute, the matter will be referred to the Regional Manager, Baroda U.P. Bank, Regional Office Etawah (UP).
19. Final Payment after completion of Project will be done with the certificate of Architect with deduction of retention money by the Bank.
20. The rates quoted in the tender shall exclude GST only but include all excise tax, octroi & other taxes, no escalation of rates will be allowed under any circumstances.

Handwritten signature in blue ink

FINANCIAL QUOTES

(To be submitted in sealed envelope)

FURNISHING & INTERIOR DECORATION WORK IN ANAND NAGAR BRANCH OF BARODA U.P. BANK, REGIONAL OFFICE, ETAWAH.

Estimate for Air Conditioning Piping and Electrical works for Baroda U.P. Bank					
Branch at ANAND NAGAR, Regional Office Eatwah.					
1. No offsite prefabrication shall be allowed in any case. All fabrication shall be done at the site after getting the materials inspected by the architect					
2.No payment shall be made for any in completed or unsatisfactory work					
3.The Contractor should strictly follow the Booklet requirements of the Bank					
Including the detailed drawings in the booklet. Any discrepancy between the booklet and the Specifications below should be brought to the notice of the Architect.					
4. List of material to be strictly as per the booklet.					
5. Cable Managers to be provided in the tables and Counters wherever required.					
6.All under frame should be properly treated with ant termite and waterproofing material					
7. All Locks in the drawers and doorstep. should be of Godrej					
8. All keyboard Trays and Drawers to be on Channel Sliding Mechanism.					
9. Etching to be providing as per Banks Design and Specification.					
S.No.	Particulars	Unit	Qty.	Rate	Amount
	The work shall also include for cutting chase for conduits and moulded boxes, if required, in the wall/ floor (Without damaging the building/wall) along with clamping the conduit at every 750mm interval & finally finishing the surface & matching the same with the existing surface. Item 1,3, 4 & 5				
	The rate should include the cost of all materials, modular switch complete with MS box & cover plate, labour, T&P, taxes & levies, scaffolding, shifting of furniture, carting away the debris and cleaning the floor etc				
1	L&F Point Wiring, Circuit wiring & Power Point wiring				
	L & F Points				
1	Primary Point Wiring for light points controlled thru modular switches complete with boxes & cover plate - The point wiring shall be carried with 3*1.5sq.mm FRLSH stranded Cu. Wires in 20mm PVC conduit pipe concealed in wall/ floor/ panelling/ partitions or above false ceiling as per requirement. The job shall include cost of circuit wiring with 3*1.5sq.mm FRLSH Cu stranded wires in 20mm OD PVC Pipe from nearest TPN Db to controlling SDb. The job shall be complete & to the entire satisfaction of the Bank. Each Switch board should be provided with suitable capacity fuses/ fuse indicator	Point	24		
2	Secondary Light Point				
	Same as above but looped from PP with 3*1.5sq.mm FRLSH stranded Cu. Wires in 20mm PVC conduit pipe concealed in wall/ floor/ panelling/ partitions or above false ceiling as per requirement. The job shall be complete & to the entire satisfaction of the Bank.	Point	20		
3	6 A switch socket points on Sdb: S/F of 6A switch points with an additional indicator and 6Amp. Modular Type switch & socket. It shall have 3*1.5sq.mm FRLSH stranded Cu. Wire as per requirement. The job shall be complete & to the entire satisfaction of the Bank.	Point	9		

[Handwritten signature and initials]

4	Point Wiring for wall fan points controlled thru modular switches complete with boxes & cover plate - The point wiring shall be carried with 3*1.5sq.mm FRLSH stranded Cu. Wires in 20mm PVC conduit pipe concealed in wall/ floor/ panelling/ partitions or above false ceiling as per requirement. The job shall also included S/F of 6A switch socket near wall fan for regulating the same. The job shall include cost of circuit wiring with 3*1.5sq.mm FRLSH Cu stranded wires in 20mm OD PVC Pipe from nearest TPN Db to controlling SDb. The job shall be complete & to the entire satisfaction of the Bank. Each Switch board should be provided with suitable capacity fuses/ fuse indicator	Each	8		
5	Point Wiring for Ceiling fan points controlled thru modular switches complete with boxes & cover plate - The point wiring shall be carried with 3*1.5sq.mm FRLSH stranded Cu. Wires in 20mm PVC conduit pipe concealed in wall/ floor/ panelling/ partitions or above false ceiling as per requirement. The job shall also included S/F of modular electronic regulator in SDb for regulating the same. The job shall include cost of circuit wiring with 3*1.5sq.mm FRLSH Cu stranded wires in 20mm OD PVC Pipe from nearest TPN Db to controlling SDb. The job shall be complete & to the entire satisfaction of the Bank. Each Switch board should be provided with suitable capacity fuses/ fuse indicator	Each	3		
6	Point Wiring for exhaust fan points controlled thru modular switches complete with boxes & cover plate - The point wiring shall be carried with 3*1.5sq.mm FRLSH stranded Cu. Wires in 20mm PVC conduit pipe concealed in wall/ floor/ panelling/ partitions or above false ceiling as per requirement. The job shall also included S/F of 6A switch socket near wall fan for regulating the same. The job shall include cost of circuit wiring with 3*1.5sq.mm FRLSH Cu stranded wires in 20mm OD PVC Pipe from nearest TPN Db to controlling SDb. The job shall be complete & to the entire satisfaction of the Bank. Each Switch board should be provided with suitable capacity fuses/ fuse indicator	Each	1		
LOM	PVC Insulated FRLSH Copper wire (ISI Marked)- Skyline/ Finolex/ Havells/ Polycab				
	PVC Conduit- CAP/ BEC/ Sieko/ AKG				
	Modular Switch/ Sockets - ABB/ Legrand/ MK/ Anchor/ Elleys/ Roma				
	<u>Power Point Wiring</u>				
1	Primary Power Point: Raw power points on workstations / table / Printer etc using 3*4 Sq.mm FRLSH Cu. stranded wire laid in 20mm OD PVC pipe medium conduit pipe laid & concealed in wall/ floor/ panelling/ partitions or above false ceiling as per requirement. Each power point shall also consists of 1 nos of 16A , 2/3/5 pin sockets & 1 No., 16A Switch , wired together forming one point. The earth wire of green color only.	Point	7		
2	Secondary Power Point: Raw power points on workstations / table / Printer etc using 3*2.5 Sq.mm FRLSH Cu. stranded wire laid in 20mm OD PVC pipe medium conduit pipe laid & concealed in wall/ floor/ panelling/ partitions or above false ceiling as per requirement. Each power point shall also consists of 1 nos of 16A , 2/3/5 pin sockets & 1 No., 16A Switch , wired together forming one point. The earth wire of green color only. Secondary P to b interlooped with Primary PP. Maximum length 6m.	Point	2		
	Total 3nos. - 1 for BM, 1 for RHS counter (2officers) + 1 in Pantry				
LOM	PVC Insulated FRLSH Copper wire (ISI Marked)- Skyline/ Finolex/ Havells/ Polycab				
	PVC Conduit- CAP/ BEC/ Sieko/ AKG				
	Modular Switch/ Sockets - ABB/ Legrand/ MK/ Anchor/ Elleys/ Roma				
2	<u>Air - Conditioning</u>				
1	AC Point: Providing AC points with circuit wiring with 3*4sq.mm FRLSH Cu stranded wires to be laid in 20mm PVC medium concealed in wall/ floor/ panelling/ partitions as per requirement. The work shall include S/F of MCB protected power unit for AC c/w 25A 2P MCB including proper connections. The job shall be complete & to the entire satisfaction of the Bank.	Point	4		
	PVC Insulated FRLSH Copper wire (ISI Marked)- Skyline/ Finolex/ Havells/ Polycab				
	PVC Conduit- CAP/ BEC/ Sieko/ AKG				
	MCB Protected Power unit c/w10kA MCB "C"- Havells/ L&T/ Siemens/ Schnider				

B w ✓ w f ✓ 9

2	Wiring with 3*4.0sq.mm FRLSH stranded Cu. wires laid in 20mm OD PVC/ flexible pipe heavy duty laid on floor & concealed in wall/ floor as per requirement to various voltage stabilizers. The job includes making connections at both ends with proper size of lugs to the entire satisfaction of the Bank.	m	14		
	PVC Insulated FRLSH Copper wire (ISI Marked)- Skyline/ Finolex/ Havells/ Polycab				
	PVC Conduit- CAP/ BEC/ Sieko/ AKG				
	<u>UPS</u>				
1	<u>UPS supply regulating Changeover:</u> S/F of 63A 4P changeover near panel for regulating UPS supply including proper connections. The supply shall be tapped from 63A 4P MCB in panel.	Each	1		
	<u>When branch is closed this change over shall always remain in "ON" position. It will enable supply to UPS even when branch is closed in evening.</u>				
	Changeover Switch- C&S/ Havells/ L&T/ HPL				
2	Incoming supply to UPS room: S/laying of 4 core 4sq.mm XLPE insulated armoured Copper conductor cable from main Panel to 4way TPN Db in the UPS room to be laid in medium duty 20mm PVC conduit/ pipe & run on surface or concealed in wall/ floor/ false ceiling including connections at both ends with lugs.	m	20		
	Cables Armoured/ Unarmoured - Finolex/ Polycab/ Havells/ RR Kabel/ KEI				
3a	S/ F of 4 way HTPN Db complete with 32A 4P MCB as incomer & 2*32 A 2P MCB as outgoing for branch MCB complete in all respects to the entire satisfaction of the Architect/ bank.	Each	1		
	Distribution Boards Double door in steel sheet housing - ABB/ MDS/ Lexic/ Siemens/ HPL				
	MCB- 10kA "C" Characteristics L&T/ Siemens/ Schnider/ Legrand				
4	Supply & laying of incoming & outgoing wiring to & from UPS with 3*4 sq.mm FRLSH stranded Cu. Wires laid in 20/25 mm flexible PVC pipe medium duty to UPS incoming & from UPS outgoing.	m	10		
	PVC Insulated FRLSH Copper wire (ISI Marked)- Skyline/ Finolex/ Havells/ Polycab				
	PVC Conduit- CAP/ BEC/ Sieko/ AKG				
5	UPS Output Db in UPS Room - S/F of 8way SPN Db c/w 63A 2P MCB and 32A 2P for branch + 2*16A 2P MCB's for FDAS & CCTV as outgoing feeders including proper connections thru lugs. The job shall be complete & to the entire satisfaction of the Bank.	Each	1		
	Distribution Boards Double door in steel sheet housing - ABB/ MDS/ Lexic/ Siemens/ HPL				
	MCB- 10kA "C" Characteristics L&T/ Siemens/ Schnider/ Legrand				
6	UPS Output Distribution Boards				
	Location on RHS wall opposite pillar behind officer on counter - S/ F of 12way SPN Db c/w 32A 2P 10kA MCB and 6nos. 6A 1P (1 Advance, 1 for cash + 2 officer beside cash cabin, 2 routers + 1*16A 1P MCB for BM complete in all respect and as required & to the satisfaction of the bank.	Set	1		
	Distribution Boards Double door in steel sheet housing - ABB/ MDS/ Lexic/ Siemens/ HPL				
	MCB- 10kA "C" Characteristics L&T/ Siemens/ Schnider/ Legrand				
7	Supply & laying of incoming wiring from UPS Db in UPS room to UPS output Db near cash cabin with 3*4 sq.mm FRLSH stranded Cu. Wires laid in 20/25 mm flexible PVC pipe medium duty complete in all respects	m	17		
	PVC Insulated FRLSH Copper wire (ISI Marked)- Skyline/ Finolex/ Havells/ Polycab				
	PVC Conduit- CAP/ BEC/ Sieko/ AKG				
8	Supply & Installation of point wiring for UPS power plug points on workstations / table for computers using 3*1.5 Sq.mm copper conductor multi stranded FRLSH wire pulled through floor raceways/conduit and taken upto table top using PVC rigid or flexible conduits run within wooden/metal partitions. Each point consisting of 3 nos of 6A , 2/3 pin sockets & 1 No., 16A Switch wired together forming one point. The earth wire of green color only.	Each	8		
	PVC Insulated FRLSH Copper wire (ISI Marked)- Skyline/ Finolex/ Havells/ Polycab				

B w r u / 2

	PVC Conduit- CAP/ BEC/ Sieko/ AKG				
	Modular Switch/ Sockets - ABB/ Legrand/ MK/ Anchor/ Elleys/ Roma				
4	<u>DISTRIBUTION MAINS</u>				
1	S/F of 3 nos. 100Amp 415V Kit kats rewirable Porcelain fuse carrier & base c/w 4 hole heavy duty neutral terminal including making of connection from electronic meter c/w wooden board etc.	Set	1		
	SFU/ Fuses- HPL/ L&T/ Siemens/ GE Power/ Schnider (MG)				
2	Wall mounted VTPN Db				
	SITC of 4way Vertical TPN DB complete with 100Amp 25kA 4P MCCB as Incomer, 63A TP MCB - 2*nos and 32A 1P MCB 3nos. as outing complete in all respects as required to the entire satisfaction of the Bank Engineer/Architect.				
	(3*- 1 Db branch + 1 Branch UPS Db)	Each	1		
LOM	Distribution Boards Double door in steel sheet housing - ABB/ MDS/ Lexic/ Siemens/ HPL				
	MCCB- Legrand/ Schnider (MG)/ ABB/ Siemens/ L & T				
	MCB- 10kA "C" Characteristics L&T/ Siemens/ Schnider/ Legrand				
3	<u>Changeover</u> : S/F of 100A 4P changeover near VTPN Db panel for regulating DG set supply including proper connections.	Each	1		
	Changeover Switch- C&S/ Havells/ L&T/ HPL				
4	S/ laying of XLPE insulated armoured Aluminium Conductor cables including cost of lugs, cable glands etc. The cable should be laid on surface with proper clamps @750mm or laid & concealed in wall/ floor/ PVC Conduit/ false ceiling complete in all respect. The work also includes cutting chases for conduits in the wall/ floor (Without damaging the building) along with clamping the cable. All connection shall be done thru proper size of lugs				
	4c 25sq.mm for Pole & fuse Kit Kats	Metre	25		
LOM	Cables Armoured/ Unarmoured - Finolex/ Polycab/ Havells/ RR Kabel/ KEI				
	Cable Lugs- Dowells				
5	S/ laying of XLPE insulated armoured Copper Conductor cables including cost of lugs, cable glands etc. The cable should be laid on surface with proper clamps @750mm or laid & concealed in wall/ floor/ PVC Conduit/ false ceiling complete in all respect. The work also includes cutting chases for conduits in the wall/ floor (Without damaging the building) along with clamping the cable. All connection shall be done thru proper size of lugs				
	4c x 10sq.mm for VTPN Db's	Metre	20		
LOM	Cables Armoured/ Unarmoured - Finolex/ Polycab/ Havells/ RR Kabel/ KEI				
	Cable Lugs- Dowells				
6	Supply, installation, testing & commissioning of 8way HTPN Db single door complete in all respects for PP & LF as under- Location LHS wall near counters	Each	1		
	Incomer - 63A 4P MCB				
	4no. 32A 1P MCB - BM + Advance+ 1 RHS+ 1rear				
	2no. 20A 1P MCB - Primary PP+ looped secondary PP - for BM & 2 officers besides cash				
	5no. 16A 1P MCB - 1 Advance + 2 router + cash+ D/w				
	4+1 nos. 10A 1P MCB for L & F - 1 Extra				
	4nos. 6A 1P MCB for L & F				
	Blanking Plates - 4nos.				
	All connection shall be done thru proper size of lugs				
LOM	Distribution Boards Single/ Double door in steel sheet housing - ABB/ Legrand/ Siemens/ HPL				
	MCB- 10kA "C" Characteristics L&T/ Siemens/ Schnider/ Legrand				

7	Strong room controlling DP MCB - Circuit wiring with 3*2.5sq.mm FR LSH stranded Cu. wires laid in 20 mm PVC pipe OD medium duty laid & concealed in wall/ floor/ panelling/ partitions or above false ceiling as per requirement. The job also includes supply & fixing of 32A 2P MCB in 2way metallic box including connections with lugs. The job shall be complete & to the entire satisfaction of the Bank.	Job	1		
	PVC Insulated FRLSH Copper wire (ISI Marked)- Skyline/ Finolex/ Havells/ Polycab				
	PVC Conduit- CAP/ BEC/ Sieko/ AKG				
	Modular Switch/ Sockets - ABB/ Legrand/ MK/ Anchor/ Elleys/ Roma				
8	Glow sign Board - Circuit wiring with 3* 2.5 sq.mm FRLSH stranded Cu. wires laid in 20 mm PVC pipe heavy duty laid & concealed in wall/ floor/ panelling/ partitions or above false ceiling as per requirement. The job shall be complete & to the entire satisfaction of the Bank.	m	12		
	PVC Insulated FRLSH Copper wire (ISI Marked)- Skyline/ Finolex/ Havells/ Polycab				
	PVC Conduit- CAP/ BEC/ Sieko/ AKG				
9	Timer - Supply of 40 A SP 230 V analog time switch panel(TIMER), in manufacturer sheet steel panel, fully prewired with all components like time switch, MCB, contactor, selector switch, indicating lamp.(1 for sign board)	Nos.	1		
	Timers- L&T/ Legrand/ Schnider/ Siemens/ GE				
5	<u>DG SET SUPPLY</u>				
1	S/laying of 4c 25sq.mm XLPE insulated armoured Aluminium Conductor cable c/w 1*6sq.mm stranded copper wire for earthing from proposed DG set to Changeover switch including its connections at both ends with lugs to be laid in 25mm dia rigid PVC /flexible conduit	m	0		
LOM	Cables Armoured/ Unarmoured - Finolex/ Polycab/ Havells/ RR Kabel/ KEI				
	Cable Lugs- Dowells				
6	<u>EARTHING</u>				
1	S/burying of Dual pipe technology (Pipe in Pipe) earthing electrode having GI 80mm O/D pipe with 25 micron coating, 3metres long. The job also includes S/F of GI strip clamp with two holes (with SS/GI bolts & nuts) on the electrode & taking one lead of 4sq.mm Cu Stranded wire upto Main panel complete in all respects with guaranteed E/N voltage of less than 2 volts and resistance less than 1 ohms. The 4sq.mm Cu stranded wire shall be terminated on a separate 6way earthlink. The connections for Panel earthing & earth bus in the panel should be taken from this earthlink. (1for power system &1 for UPS). The distance between two earthing pits to be 10ft or more.	Job	2		
2	Supply & Fixing of 4sq.mm FRLSH Cu. Stranded wire on surface or in recess for loop earthing as required earthing to Db's or main panel as required.	m	29		
	PVC Insulated FRLSH Copper wire (ISI Marked)- Skyline/ Finolex/ Havells/ Polycab				
3	S/F of G I Strip earth clamp	Each	2		
7	<u>SUPPLY & FIXING LIGHT & FAN ITEMS</u>				
1	S/F of Energy efficient recessed mounted LED luminaire - 30/32w LED recessed mounted 2'X2' luminaire suitable for grid ceiling with indirect lighting delivering soft and uniform light - Make as approved by Bank/ architect	Each	16		
	Light fittings - Philips/ Wipro/ Osram/ Havells/ Crompton Greaves				
2	S/F of recessed LED downlighter - 15w LED recessed mounted high performance low-height LED downlighter c/w robust PDC housing complete in all respects- Make as approved by Bank/ architect	Each	13		
	Light fittings - Philips/ Wipro/ Osram/ Havells/ Crompton Greaves				

3	S/F of Surface & wall mounted LED batten - Ultra-slim poly carbonate decorative LED batten with inbuilt heat sink, anti glare polycarbonate diffuser & energy efficient electronic driver 20W 1800 lumens - Make as approved by Bank/ architect	Each	14		
	Light fittings - Philips/ Wipro/ Osram/ Havells/ Crompton Greaves				
4	S/ F of 2*18w LED Highly robust Industrial Box type Luminaire c/w 2nos. 18w LED tubes complete with in built driver, Double sided connection suitable for Surface, Wall and Conduit mounting c/w 2 nos. 20mm metallic conduit pipe for hanging complete in all respects.	Each	1		
	Light fittings - Philips/ Wipro/ Osram/ Havells/ Crompton Greaves				
5	S/F of wall mounted fan 450mm sweep - Sturdy & heavy duty 3 Blades, 120 spokes Nickel Chrome plated guard	Each	8		
	Fans- Crompton/ Havells/ Bajaj/ Usha				
6	S/F of energy saving/ efficient ceiling fan 1200mm sweep double ball bearing type Make as approved by Bank/ architect	Each			
	cost of electronic regulator to be quoted in CF point wiring above.				
	Fans- Crompton/ Havells/ Bajaj/ Usha				
7	Supply & Fixing of fresh air fan 230mm sweep - Make as approved by Bank/ architect	Each	1		
	Fans- Crompton/ Havells/ Bajaj/ Usha				
8	<u>Telephone system</u>				
1	S/F modular telephone jack single with shutter outlet (RJ-11) with mounting box & front plate complete with chase cutting, mending good etc. as required including Supply & laying of 2 pair unarmoured 0.61mm dia. PVC insulated twisted pairs bunched together telephone cables through rigid 20mm dia PVC conduit as directed by the Bank/ Architect from telephone junction box to telephone socket outlet including interconnection as required complete in all respects.	Each	3		
	Telephone Wire -Delton/ Skyline/ Finolex/ Rallison/ Batra Henley				
2	10 Pair Tag box	Each	1		
	Telephone Tag Blocks- Krone/ Pouyet/ TVS				
3	MDS Box	Each	1		
	MDS box - Krone/ Pouyet/ TVS				
Total Cost of Electrical works					
DATA CABLING					
1	Supplying and laying D-link make CAT-6e Cable in PVC 20mm dia OD medium conduit complete with <u>CAT-6 information outlet with plate & surface Box</u> at work tables marked as DP	Point	8		
	PVC Conduit- CAP/ BEC/ Sieko/ AKG				
	Cable - Digi Link/ Clipser/ National/ Polycab/ Lapp/ Finolex				
	I/O- DigiLink/ Tyco (AMP)/ Schnider/ D- Link				
2	S/ F of 7ft Grey colour Patch chord	Each	8		
	Patch Chord- DigiLink/ Tyco (AMP)/ Schnider/ D- Link				
3	S/ F of 3ft Grey colour Patch chord	Each	8		
	Patch Chord- DigiLink/ Tyco (AMP)/ Schnider/ D- Link				
4	Dismantling & refixing of existing Rack, Patch Panel & Switch from the existing branch to the new proposed branch.	Job	1		
Total for Data/ LAN Cabling					

	TOTAL FOR ELECTRICAL & DATA CABLING				

Date :

Seal and sign of firm

Handwritten signature and date: 12/11/19

FINANCIAL QUOTES
(To be submitted in sealed envelope)

**FURNISHING & INTERIOR DECORATION WORK IN ANAND NAGAR BRANCH OF BARODA
U.P. BANK, REGIONAL OFFICE, ETAWAH.**

- Bill of Quantity for Furnishing works for Baroda U.P. Bank
Branch at Anand Nagar
Region - Etawah
1. No offsite prefabrication shall be allowed in any case. All fabrication shall be done at the site after getting the materials inspected by the architect
 2. No payment shall be made for any in completed or unsatisfactory work
 3. The Contractor should strictly follow the Booklet requirements of the Bank including the detailed drawings in the booklet. Any discrepancy between the booklet and the Specifications below should be brought to the notice of the Architect.
 4. List of material to be strictly as per the booklet.
 5. Cable Managers to be provided in the tables and Counters wherever required.
 6. All under frame should be properly treated with antitermite and waterproofing material
 7. All Locks in the drawers and doorsetc. should be of Godrej
 8. All keyboard Trays and Drawers to be on Channel Sliding Mechanism.
- *The contractor to follow the banks colour Coding. Any other specified colour to be superceded by the Banks Colour code.
*All board to be BWP. Of approved brand and if written BWR it should be superceded by BWP board/ply.

S.No.	Description of item	Unit	Qty.	Rate	Amount
1	P1- (Full height glazed/Unglazed partition All partitions to have etching as per the design of the Architect.	Sq.Ft.	145.00		
	Glazed Partition(upto false ceiling height only considered and above necessary ceiling supports to be provided) with Anodized Aluminium frame work, heavy sections (2mm thickness) of 2"x1.5" section, spacing of 2'0"x2'0" on bothsides and covered with 9mm thick BWP plywood finished with 1mm thick laminate of banks colours for skirting & borders on both sides and approved colour laminate for base colour on both sides. Above 1'0"/2'6"/3'0" height partition, fixed with 8 mm bevelled glass with sticker works door and teak wood beading with melamine polish. Clear glass shall be finished with frosted film sticking over the glass of approved pattern and design. Rate to include providing cutouts and provisions to run electrical conduits, switches, etc. Cost include wastages, transports, loading, unloading charges, labours, materials, tools, lead, lift and etc. Complete as per drawings and instructions of the Architect.				
	The job shall also include for provision of laying conduits, switch boxes etc. The erection of partition shall include for expansion bolts cleats, clamps bolts, nuts, screws, rivets and other accessories, all complete up to the satisfaction of the Architect.				
	The partition and doors shall have hinges floor springs/sliding arrangement/ hydraulic door closer, mortise locks with handle set (Godrej, Dorma make all), etc. The rate shall include cost of all materials, labour, T&P, wastages, etc. required for proper completion of work, all complete to the satisfaction of the Architect.				
	Full height Solid partition (height 10'-6" or ceiling height) with Anodized Aluminium frame work, heavy sections (2mm thickness) of 2"x1.5" sections, spacing of 2'0"x2'0" on bothsides and covered with 9mm thick BWP plywood finished with 1mm thick laminate of approved colour for skirting & borders and laminates for base on both sides with all necessary fixing accessories, arrangements and etc. Partition shall have necessary opening of approved size as per standards for fixing machine's and additional frame to be fixed for strengthening the partition. Rate to include providing cutouts and provisions to run electrical conduits, switches, etc. Cost include wastages, transports, loading, unloading charges, labours, materials, tools, lead, lift and etc. Complete as per drawings and instructions of the Architect.				

Handwritten signature and date: 2/9

2	P2- (Low Height Partition up to 4'-6" ht.) glazed/Unglazed partition etching as per the design of the Architect.	Sq.Ft.	230.00		
	Half Height partition to be made with Anodized Aluminium frame work, heavy sections (2mm thickness) of 2"x1.5" sections, spacing of 2'0"x 2'0" on bothsides and covered with 9mm thick BWP plywood finished with 1mm thick laminate of approved colours for skirting & borders and white colour laminates for base on both sides with all necessary fixing accessories, arrangements and etc. Partition shall be block partition till 3' ht. and 1'-6" glazing. It shall have 12mm thick etched glass and fixed with teak wood beading with melamine polish. Clear glass shall be finished with frosted film sticking over the glass of approved pattern and design. Rate to include providing cutouts and provisions to run electrical conduits, switches, etc. Cost include wastages, transports, loading, unloading charges, labours, materials, tools, lead, lift and etc. Complete as per drawings and instructions of the Architect.				
3	P3-Cash Cabin Partition (HT-7'-0" only)	Sq.Ft.	125.00		
	Providing and fixing of Cash Enclosures at height of 7'-0" with Anodized aluminium frame work, heavy sections (2mm thickness) of 2"x1.5", spacing of 2'0"x2'0" on bothsides and covered 6mm thick BWP plywood finished with 1mm thick laminate of approved colour. Partition shall have provision for opening and 19mm BWP plywood tray for challan receiving purpose. Cost include aluminium grill and fixed with teak wood beading and duco paint. Cost also include 3 Nos of Solid core flush Doors with sizes of 2'6"x7'0", fixed in the partition. Door shall have teak wood beading and lipping with duco paint. Door finished with 1mm thick laminate of approved colour for skirting of approved pattern. Door shall have 8mm glass fixed with teak wood beading and duco paint. Rate to include hardware's like brass hinges, godrej three nos of night latch, door closure, door stopper and handles. Cost also include cash transaction opening shall be provided with door arrangements made with BWP plywood frame work finished by laminate, duco paint and locking system. Cost include wastages, transports, loading, unloading charges, labours, materials, tools, lead, lift and etc. Complete as per drawings and instructions of the Architect.				
	Decorative Grill (12mm thk)-hexagonal opening as per instruction of Bank's Engineer/Architect.) All exposed edges of Plywood shall be fixed with 1/8" C.P. Teak Lipping.				
4	Cash Cabin-Aluminium Grill Top with teak Decorative Grill Partition).	Sq.Ft	48.00		
	Providing and fixing of Aluminum grill work in cash counter top with all nessecary fixing support of 'L', 'H' and 'C' aluminium sections and etc. Cost include 'L', 'H' and 'C' aluminium sections, hardwares, tools, wastages, lead, lift, labour charges, loading, unloading charges, cutting, transport and etc. Complete as per instructions of the Architect.				
5	P4-Fully Glazed Partition (Along with entrance door for Branch)	Sq.Ft.	120.00		
	Door Size-4'-0" X 7'-0" and one no. 2'-0" X 7'-0				
	Frame- 6"X2" Aluminium powder coated frame (18 gauge) (All four sides) with approved colour Bank's Engineer/Architect				
	Glass 5.0/ 6.0mm thick Plane glass with mat film as approved by architect/bank engineer)				
	Floor Spring-Heavy Duty appropriate size (Hyper/Everite make)				
	Handle-'D' Type stainless steel finish both sides with push/pull indication)				
6	P5- Wicket Gate Solid	NO.	1.00		
	(Banking Hall) SS finish Hinges				
	Size-3'-0" X 4'-0"				
	Board-19mm thick (MR Grade IS303)				
	(Incl Door Closer/Stopper)				
7	C1-Staff Counter (Front counter)	Rft	11.00		

Handwritten signature and initials in blue ink.

	Providing & Fixing clerical counter made out of 19.0mm thick BWP Grade ply IS 303 frame work for top, verticals, shelves, apron, sides, drawer unit, shutters, side units, customer top, foot rest, 12.0mm thick BWP Grade ply for drawer sides, sliding shutters, front apron & 6mm thick BWP Grade ply for side unit back, drawer bottom, drawer unit back along with necessary 2" X 2" or 2" X 1.5" of laminate matching imported wood molding & teak wood supports for fixing of top. The clerical counter shall have 2'-6" in depth & counter shall have two tops i.e. one at 2'-6" for writing and second at 3'-0" for customer in height finish in approved make/color 1.0mm thick laminate etc. complete. The clerical counter shall have 1 No. of key board tray, 2 Nos. of equal drawers or as per the Bank requirements & one open able shutter. All exposed surfaces i.e. apron, counter side etc. finish with approved make/color 1.00mm thick laminate & moulding finish with 3 coats of melamine polish and internal surfaces shall have zinc oxide polish along with necessary approved Stainless Steel.				
	Hinges, Ball Catches, Stainless Steel Locks, approved design Stainless Steel Handles, Stainless Steel Powder Coated Grommet (wire manager), Wood Foot Rest (Movable) Earl-Bihari make Twin Telescopic Channel, CPU Hanger/Trolley INNOFIT make etc. complete as per detail drawing and Instructions of the Bank's Engineer/Architect.				
b	Cash Counter	RFT.	5.50		
	Providing and fixing into position Cash counters as per detailed drawing made of Phenol bonded 19mm thick commercial board finished with 1.0mm thick laminate on top, front and sides as per detailed drawing. The front member of the cash counter to continue to 3'-8" height. At 3'-8" m height a projection of 15cm extended towards the customers side while a projection of 25.5 cm will be extended towards the staff. The outward projection to be made of 19 mm thick phenol bonded commercial board finished with 1mm thick laminate top. The counter to have one drawer unit of 3 drawers & space for CPU. 2 drawers to have division for cash as banks specifications. The exposed edges to have TW beading as in the design.				
	The item included all hardware such as channels of glydo/ hettich/ flyrail, self closing hinges/ locks/ handles/ laminated keyboard tray, Other hardware etc. The exposed surfaces to be finished with 1mm thick laminate of approved shade. Provision of footrest to be made as specified. All exposed wooden surfaces to be finished with clear melamine polish as approved by the Architect. All unexposed surfaces to have synthetic enamel paint with primer, all complete as per detailed drawings and direction of the Architect. The counter to have provision for cable manager and keeping mouse.				
8	12 mm Glass on Front Counter & Cash Counter etching as per the design of the Architect.	Sq. ft.	45.00		
	12 mm float glass with rounded edges with etching as per the requirement of bank for Front counter (Height: 60 cms) (With teak wood frame 70 cm).				
9	S1-Storage (Low ht/Over Head)	Sq.Ft.	62.00		
	Providing and fixing Full height/ (Low Height) /Over-Head storage e 400mm deep made out of 19mm BWP block board finished with 1.0mm laminate in allexposed areas. The drawers to be made out of 19mm BWP block board in the front clad with 1.0mm laminate (color, vertical grain). sides to be made out of 12mm BWP plywood and bottom made out of 6mm BWP plywood duly painted in matching tone and it should play on drawer sliding channels. The shutters to be made out of 19mm BWP block board and should play on drawer sliding castors on powder coated channels. The necessary locks, handles, etc to be provided. Inside of the unit to be enamel painted in matching tone. All the exposed edeges of the boards/plywoods to be coverd with wooden lippings/ mouldings duly polished all complete. The work to be completed as per approval and specifaicon of the Architect.				
	Handle-Brush finish stainless steel				
	Lock-Vijayan/Godrej				
10	Column Pannelling & Meter Box	Sq.Ft.	105.00		

Handwritten signature and checkmark

	Column Panelling -upto false ceiling height only considered and above necessary ceiling supports shall be provided) with Anodized Aluminium frame work, heavy sections (2mm thickness) of 2"x1.5", spacing of 2'0"x2'0" on bothsides and covered with 9mm thick BWP plywood finished with 1mm thick laminate of approved colours for skirting & borders and base colour laminates for base colour. Rate to include providing cutouts and provisions to run electrical conduits, switches, etc. Cost include necessary hardwares like clamps, screws and etc. Cost include provisions for electrical db closing 19mm thick BWP plywood door arrangements, wastages, transports, loading, unloading charges, labours, materials, tools, lead, lift and etc. Complete as per drawings and instructions of the Architect.				
	Wooden Cabinet in Branch for electrical panel made with 19mm ply (IS 303) and 1.00 mm thick laminate with air vent Aluminium louvers and door with interlock. 8' X 5' X 1'-6" or 'As per requirement of the site complete in all respect.				
11	A.C.P. on Rolling Shutter Box with Trap Door	Sq.Ft.	85.00		
	Frame Work-2" X 2" X 1.5 mm thick Aluminium Tubular section (Horizontal/Vertical) Jindal Make				
	Aluminium Composite Panel-3.0mm thick of approved colour with bonding material as per bank's specification or as per instruction of Bank's Engineers/ Architect to meet the new layout and colour scheme. Complete in all respect				
12	T1- Manager Table with side table and 12mm thick glass	No.	1.00		
	Same as above complete work including 12 mm thick glass on top.				
	Size-5'-6" X 2'-6" X 2'-6"				
	(5'-6" length, 2'-6" width & 2'-6" height)-Providing Table in position, Top shall be made of 19mm thick BWP comm. Board finished with 1.00mm thick laminate 1 3/4" x 1" teak wood beading as per design on all sides. The sides shall be made of 19mm thick BWP comm. board finished with 1.00 mm th laminate as per design. with teak wood lipping on all exposed ends of sides The front apron shall be made of 19mm thick BWP comm. board finished with 1.00mm thick laminate as per design The drawers to be made out of 19mm thick comm. BWP board duly laminated in the front, sides to be made out of 12mm BWP comm. plyw and bottom to be made out of 6mm BWP comm. ply and it should play in drawer sliding channels. The inside of the drawer and the table to be duly paint. laminated. A legrest to be provided duly paint made out of 3"x2" thk wooden section. A shutter to be made by 19mm BWP comm. board cladded with 1.0 mm laminate. The necessary locks handles to be provided in each drawers and shutters. On top of the Branch managers table 12mm thk glass to be placed duly edge polished. The table should have key board tray and tea tray duly finished with 1.0 mm laminate. The necessary wire managers to be provided on the tables and provision for lights to be kept if required in the front of the table. (coat of Ant termite treatment oil)				
	Side Table-3'-0" X 2'-6" X 1'-6"				
	Ply Wood-19.0mm thick BWR Grade for frame work				
	Drawer-1'-6" wide two drawers and one shutter below the drawers at left side of the table and two drawers at side table and below two shutters				
	Laminate-1.0mm thick approved colour				
	Key Board Tray-Metal INNOFIT make				
	CPU Metal Stand, Twin Telescopic Drawer Fittings, Brass Powder Coated Wire Manager				
	Handle-Brush finish stainless steel, Brass Ball Catches 12.0 thick plain glass with edge polish at top of the table (Other Exposed Edge of Ply with half round beading with approved colour polish)				
b	Officer Table with Side Table and including 12 mm thick glass on top.	No.	1.00		
	Size-4'-9" X 2'-6" X 2'-6"				
	Other specifications as above				

(Handwritten signature and date)


13	Mineral Fiber ceiling with UNI T 15mm T Grid & 16mm MPRESSIONS™ ClimaPlus™ Ceiling tiles (600x600mm)	Sq.Ft.	396.00		
	This includes USG Knauf UNI T 15mm grid Wall angle of 19mmx 19mm x 0.40mm shall be screw fixed to brick wall/partition with the help of approved screws at 600mm centres. Then suspending USG Knauf UNIT 15mm Main T grid of 15mm x 38mmx0.30mm of length 3600mm is hung with USG Knauf adjustable level clips 80x30x0.70mm & 4mm diameter GI rod which are connected to USG Boral Soffit Cleat 37mmx 27mmx 1.6mm and 8mm dia 40mm long Anchor Fasteners @1200mm centres or as approved from RCC Slab. The USG Boral UNIT 15 Cross T of 15mm x 38mmx0.30mm of 1200mm length shall be interlocked between main T Grid at 600mm centres to form 1200 x 600mm modules. 600 x 600mm modules to be formed by click fitting USG Knauf UNIT 15 Cross T of 15mm x 38mm of 600mm length centrally between the 1200mm cross T's Then 16mm thick IMPRESSIONS™ ClimaPlus™ ceiling panel having FLB edge of size 595x595 shall be placed into the above grid of size 600x 600 mm. This ceiling panel confirms to ASTM E84 surface burning characteristics.(Class A, Flame Spread: 25 & Smoke developed: 50). The Ceiling panel provides NRC 0.60, CAC minimum: 33. Light Reflectance: 0.84, recycled content - 45% Thermal Resistance: R- 0.3 & can withstand Relative Humidity up to RH 99% (limiting conditions -Max 49 degree C/99%RH). The front & back side of the tile has anti- Microbial ZOE coatin. Complete as per drawings and instructions of the Architect. MAKE-USG Knauf				
14	False Ceiling Works Gypsum	Sq.Ft.	540.00		
	Providing and fixing Gypsum False Ceiling which includes USG Knauf ST50 Perimeter Channels (Material-IS277, 120GSM galvanizing coating both sides inclusive) of size 0.50mm thick (having One Flange of 20mm and another flange of 30mm and a web of 27mm) along with perimeter of ceiling, screw fixed to brick wall/partition with the help of Nylon sleeves and screws at 600mm centers. Then suspending USG Knauf ST50 intermediate channels (Material-IS277, 120GSM galvanizing coating both sides inclusive) of size 45mm (0.9mm thick with two flanges of 15mm each) from the soffit at 1220mm centers with USG Knauf ST50 ceiling angle of width 25mm X 10mm X 0.50mm thick fixed to Soffit with soffit cleat and Anchor fasteners. USG Knauf ST50 Ceiling section of 0.50mm (Material-IS277, 120GSM galvanizing coating both sides inclusive) thick having knurled web of 51mm and two flanges of 27mm each with lips of 10.5mm are then fixed to the intermediate channel with the help of connecting clips and in direction perpendicular to the intermediate channel at 457 mm centers. Gypsum centers. Gypsum board facia of 150 mm high as per the direction of the Architect				
	USG Knauf 12.5mm thick Standard Plasterboard (conforming to IS 2095:2011, 3rd party certified is then screw fixed to ceiling section with 25mm dry wall screws at 230mm centers. Screw fixing is done mechanically with drilling machine with suitable attachment. Finally tapered edges of the Standard Plasterboards are to be jointed and finished so as to have a flush look which includes filling and finishing with Premix Jointing compound, joint paper tape (Confirming to ASTM C475) suitable for Standard board (as per recommended practice of manufacturer). Rate to be included all kinds of profiles and cut outs required for light fixtures, Speakers, Smoke detector, trap doors and AC grill in the ceiling. Complete as per drawings and instructions of the Architect. MAKE-USG Knauf				
	No additional payment to be payable for grooves, cut-outs, additional supports for electrical / HVAC& all services ,etc. No deduction of electrical fixtures / AC diffuser / grills etc. from payable ceiling area.i				
	The ceiling fixing should adhere to the manufacturers instructions				
15	Writing Table & Brochure Holder. With suggestion box and complaint box. and notice board	NO	1.00		
	In Branch Hall as per Drawing				
	Providing and fixing in position (with rear wall) slip and customer writing desk (as per design) of over all size -1200mm x 450mm x 300mm. as per detailed drawing The fixing shall include for expansion bolts, cleats, clamps, bolts, nuts, screws, rivets and other anodized accessories, all complete up to the satisfaction of the Architect.				

Handwritten signature and initials in blue ink.

<p>The writing top and facia/sides shall be made out of 19mm thick water proof board with 1mm thick laminate (as per shade approved by the architect), on all sides and 20mm thick granite top. It shall also include for providing, laying and fixing 20mm thick machine cut and machine polished granite stone (joint less) on tops. It shall have different sizes, shapes and colour (as approved by the Architect) of cost to be Rs.250. 00/Sq.Ft. (approx.). It shall be laid over the base of 19mm thick water proof board (already considered in various items.) and fixed with araldite. It shall include for beveling and polishing at all the exposed edges. The rate shall include cost of all materials, labour, scaffolding, wastages, polishing and T & P etc. required for proper completion of work.</p>				
<p>It shall be fixed and supported with the help of two M.S. angle iron (40mm x 40mm x 6mm) brackets, painted white. The brackets shall be grouted in rear wall with help of cement concrete in the ratio of 1:2:4 (1 cement, 2 coarse sand and 4 graded stone aggregate) rendered smooth with cement plaster in the ratio of 1:6 (1 cement and 6 fine sand) to match the existing.</p>				
<p>It shall also include for the fascia, for holding the slips and stationary. It shall be made out of 12mm thick water proof plywood (two surfaces of 6mm thickness, fixed together, where required) on rear and both sides. The front shall be made out of 12mm thick glass (as per profile). It shall be fixed in the grooves, made in side members, in an inclined manner (as per profile in drawing enclosed) with a gap of 75mm (max.) in between. The space shall be further divided in four equal parts with help of 12mm thick water proof plywood. All edges of the glass shall be polished.</p>				
<p>All the exposed edges of water proof board and plywood shall be provided with 6mm thick teak wood/hard wood lipping. All teak wood surfaces shall be melamine polished and other internal surfaces shall be painted with two coats of synthetic enamel over one coat of primer, all complete to the satisfaction of the Architect.</p>				
<p>Total Amount</p>				
<p>Note: All rates are excluding G.S.T.</p>				

Date:

Seal and sign of firm

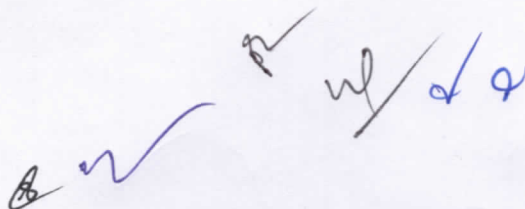

BARODA U.P BANK REGIONAL OFFICE-ETAWAH


LIST OF MATERIALS OF APPROVED BRAND AND/OR MANUFACTURER

1. The contractor shall use materials in their work subject to inspection, prior to dispatch, by Owner or his authorized representative of any materials not otherwise specified, shall be in accordance with the following list. All materials not otherwise specified shall be in accordance with the latest Indian Standard Specifications, where such exists with prior approval of Owner /Architects. The contractor shall be bound to offer sample of materials, which are claimed to be conforming to I.S Specification, for testing at an approved testing laboratory.
2. Contractor shall purchase all materials from the makers or their authorized stockist only. Necessary documentary evidences must be produced to the Owner or their authorized Representative on demand.
3. Contractor shall be bound to supply items or any make of the items as per the choice of the Owner/Architects.

A CIVIL/FURNISHING WORK

S.No	Description	Approved Brand/Manufacturer
1.	Cement	M/s ACC, M/s Prism, M/s Jaypee
2.	Wood	First class Steam beach wood or as specified
3.	Polish	MRFPolyurethane
4.	Termitetreatment	Chloropyrophos 20% concentration/Dusban /Terminatorpidlitemake
5.	Soft Board	Celotex
6.	Flase Ceiling and Sections	Grid Tiles---USG Knauf
7.	Aluminium sections	Hindalco, Jindal, Indal
8.	Vitrified Floor tiles	RAK Asian, Regent, Kazaria, nitco
9.	Block boards/Plywood/Flush doors	M/s Green Panel (BWP), M/s Archid (BWP), M/s Century (BWP), alternate brands from the same manufacturer allowed
10.	Laminates	M/s Greenlam, M/s Century, M/s Aerolam, M/s Archid 1.0 mm thick only.
11.	Hardware-(Aluminium)	Approved design, brand, quality & manufacture allowed
12.	Hardware	ALL HARDWARE TO ONLY GODREJ
13.	Drawer/cabinet Handle/locks	Dorset/Kitch/Godrej/hettich
14.	Magnet Catcher	Supreme, Excel
15.	Drawer/cabinet shutter Accessories	Ebbco, Hettich
16.	Synthetic Enamel Paints, Distemper or Plastic paint Best quality of make as approved	Asian Paints Ltd), Berger Paints (India) Ltd. (Luxol), ICI, Nerolac.
17.	Venetian blinds/verticals	vista
18.	Glazing	M/s Modiguard, M/s asahi india, Saint Gobain.
19.	Door Closer/floor spring	Godrej, Dorma, Ozone
20.	Glue Adhesive	Fevicol, Century
21.	Door handles/Locks	Godrej
22.	Screw	Excel GKW

(Handwritten signature and date 2/9)

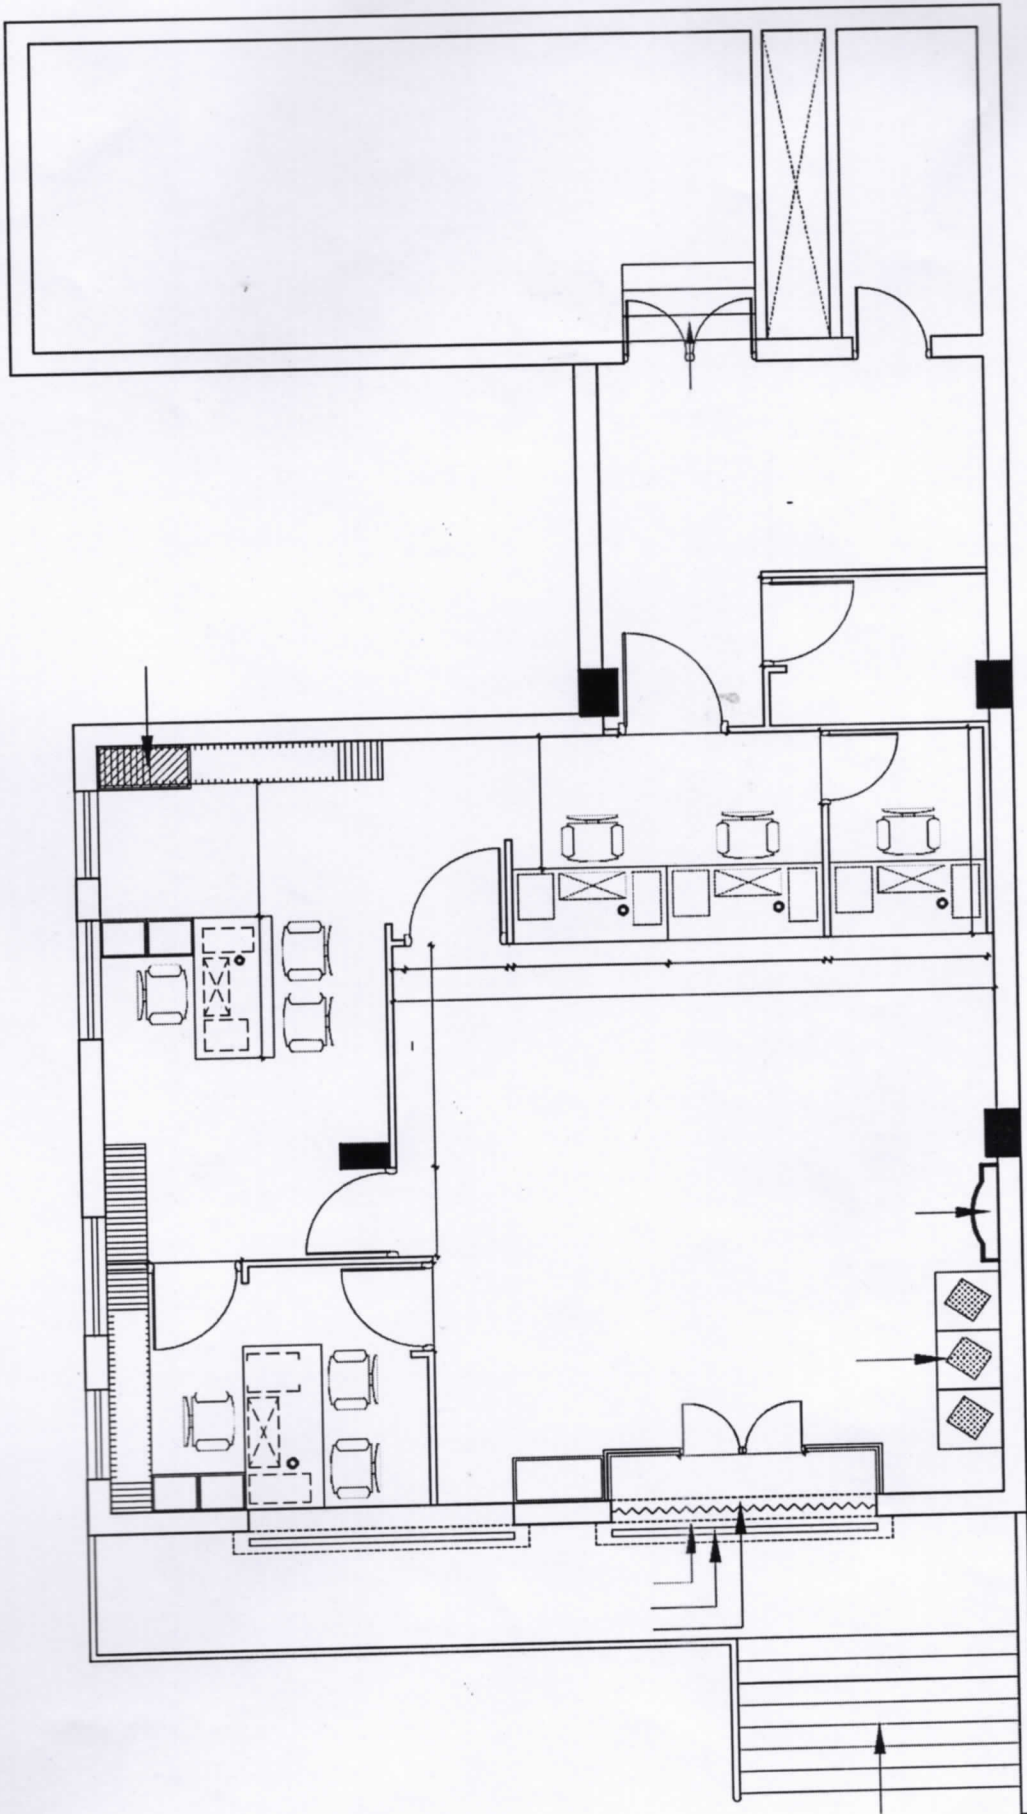

Lay out plan for Anand Nagar Branch

Drq. Title

North




GUNJAN & ASSOCIATES

Date

Drawn By

Handwritten signature and date: 20/11/19

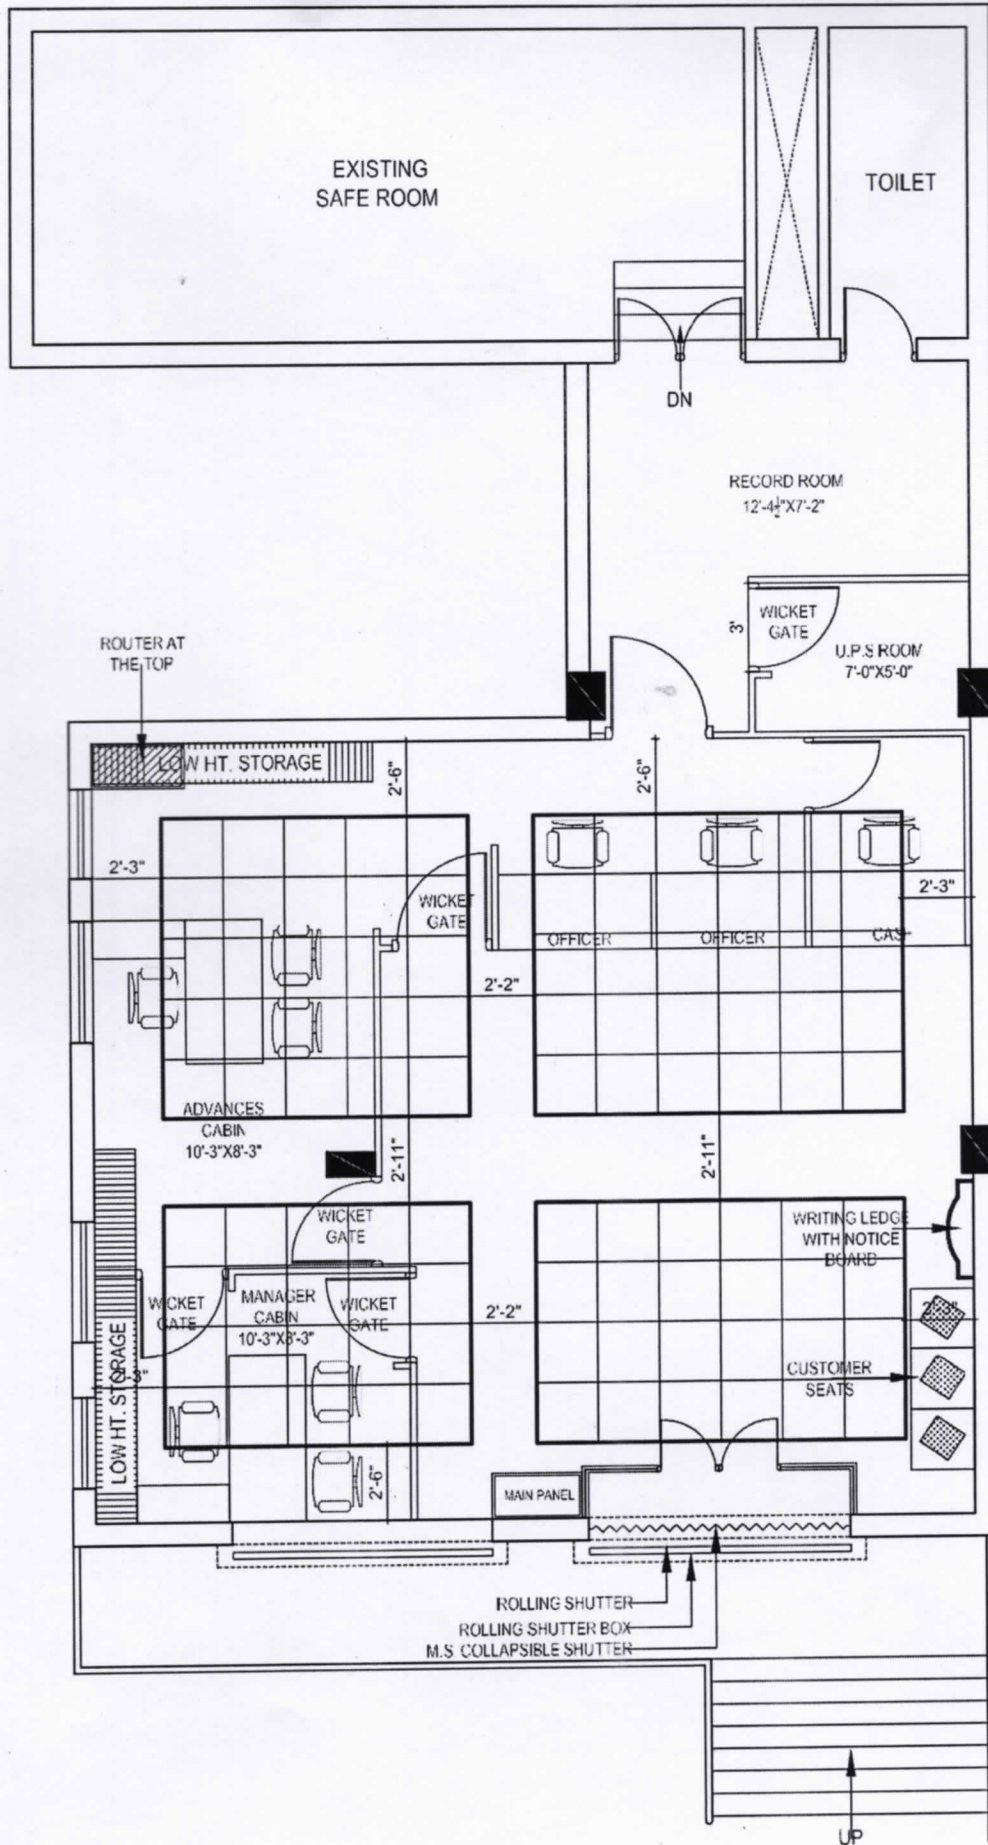

DRG. TITLE:-

FALSE CEILING PLAN
FOR BARODA U.P. BANK AT
ANAND NAGAR BRANCH
REGIONAL ETAWAH

Drg. Title

UPPER GROUND
FLOOR

North



Date


JULY-2022

Drawn By

GUNJAN & ASSOCIATES

ARCHITECTS, ENGINEERS, INTERIOR
AND LANDSCAPE DESIGNERS.
141, SAINIK NAGAR LANE NO-9 RAEBARELI ROAD
LUCKNOW-225002
Phone: +91 9839018489, 9838818489
E-mail: gnan1011@gmail.com, gnanp@gmail.com

Handwritten marks and numbers at the bottom of the page, including '21' and checkmarks.

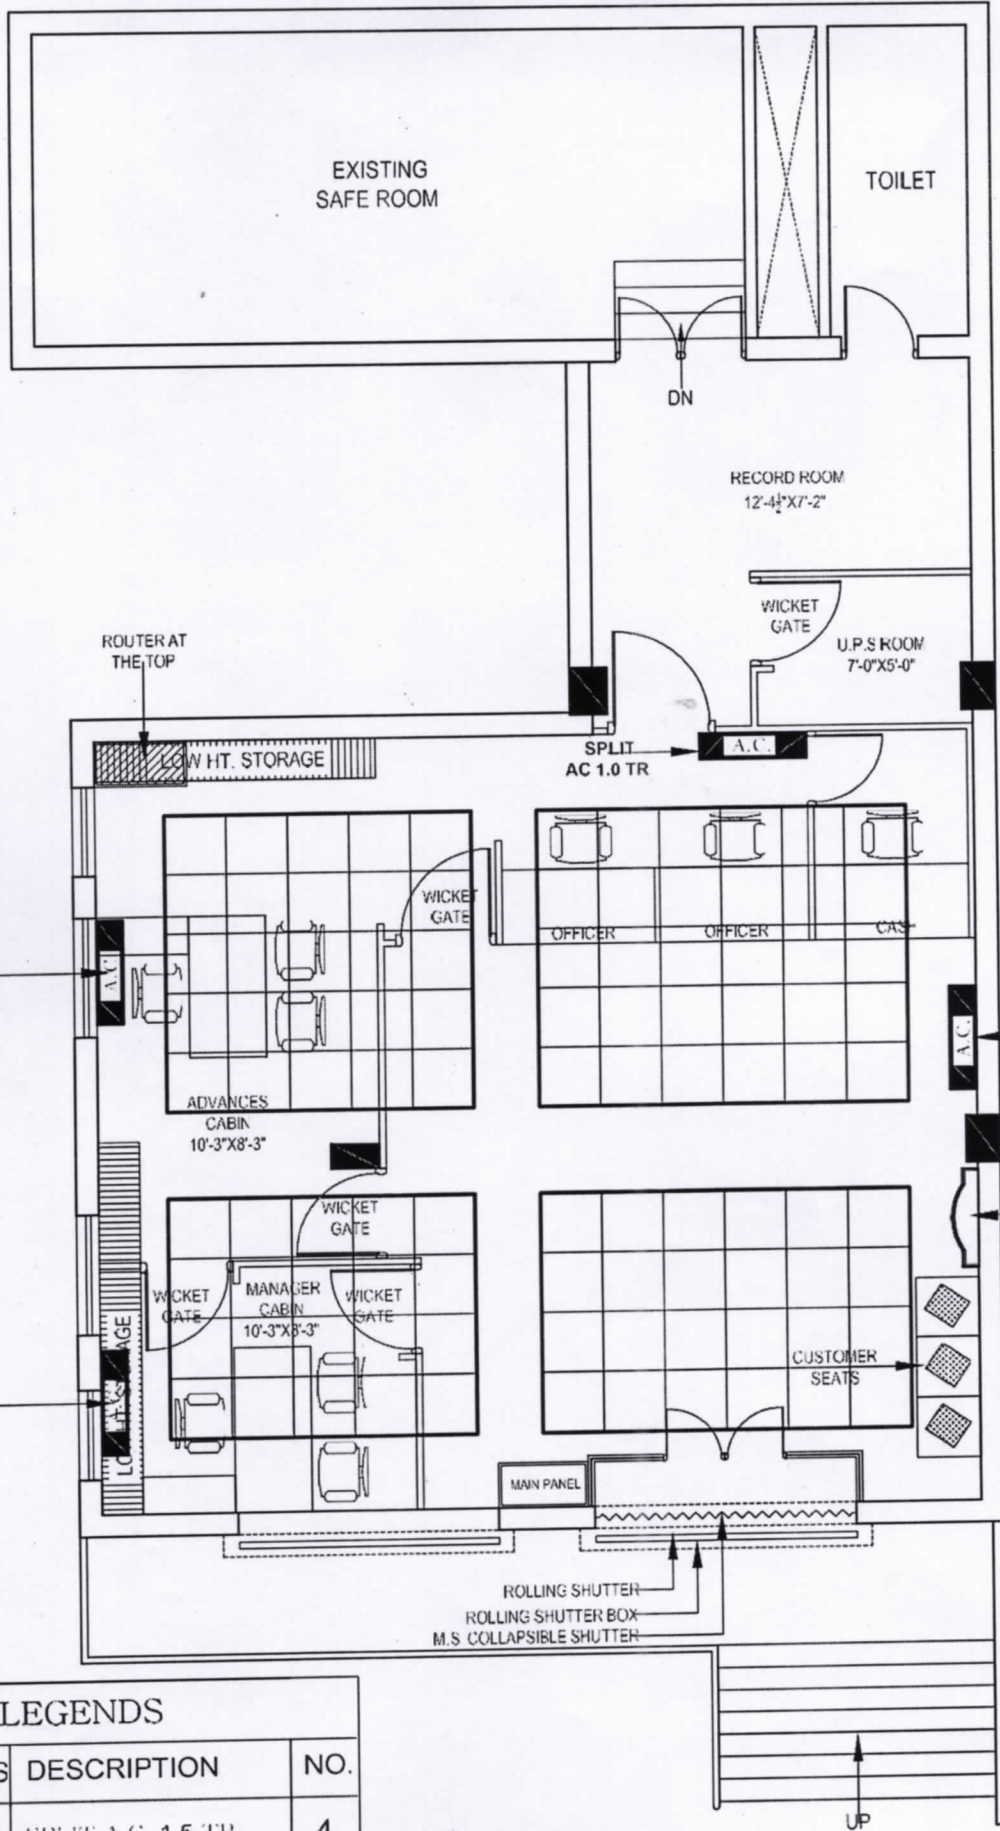

LEGENDS

SN.	SYMBOLS	DESCRIPTION	NO.
1		SPLIT A.C. 1.5 TR.	4

DRG. TITLE:-
 AC PLAN FOR
 BARODA U.P. BANK AT
 ANAND NAGAR BRANCH
 REGIONAL ETAWAH

Drq. Title
 UPPER GROUND
 FLOOR


Date
 JULY - 2022

North

Drawn By

GUNJAN & ASSOCIATES
 ARCHITECTS, ENGINEERS, INTERIOR
 AND LANDSCAPE DESIGNERS.
 141, SAINIK NAGAR, LANE NO-9 RAEBARELI ROAD,
 LUCKNOW-226002
 Phone: +91 9839018489, 9838818489
 E-mail:- garun1511@gmail.com, anurajg@yahoo.com

Handwritten notes: 22 ✓ 9

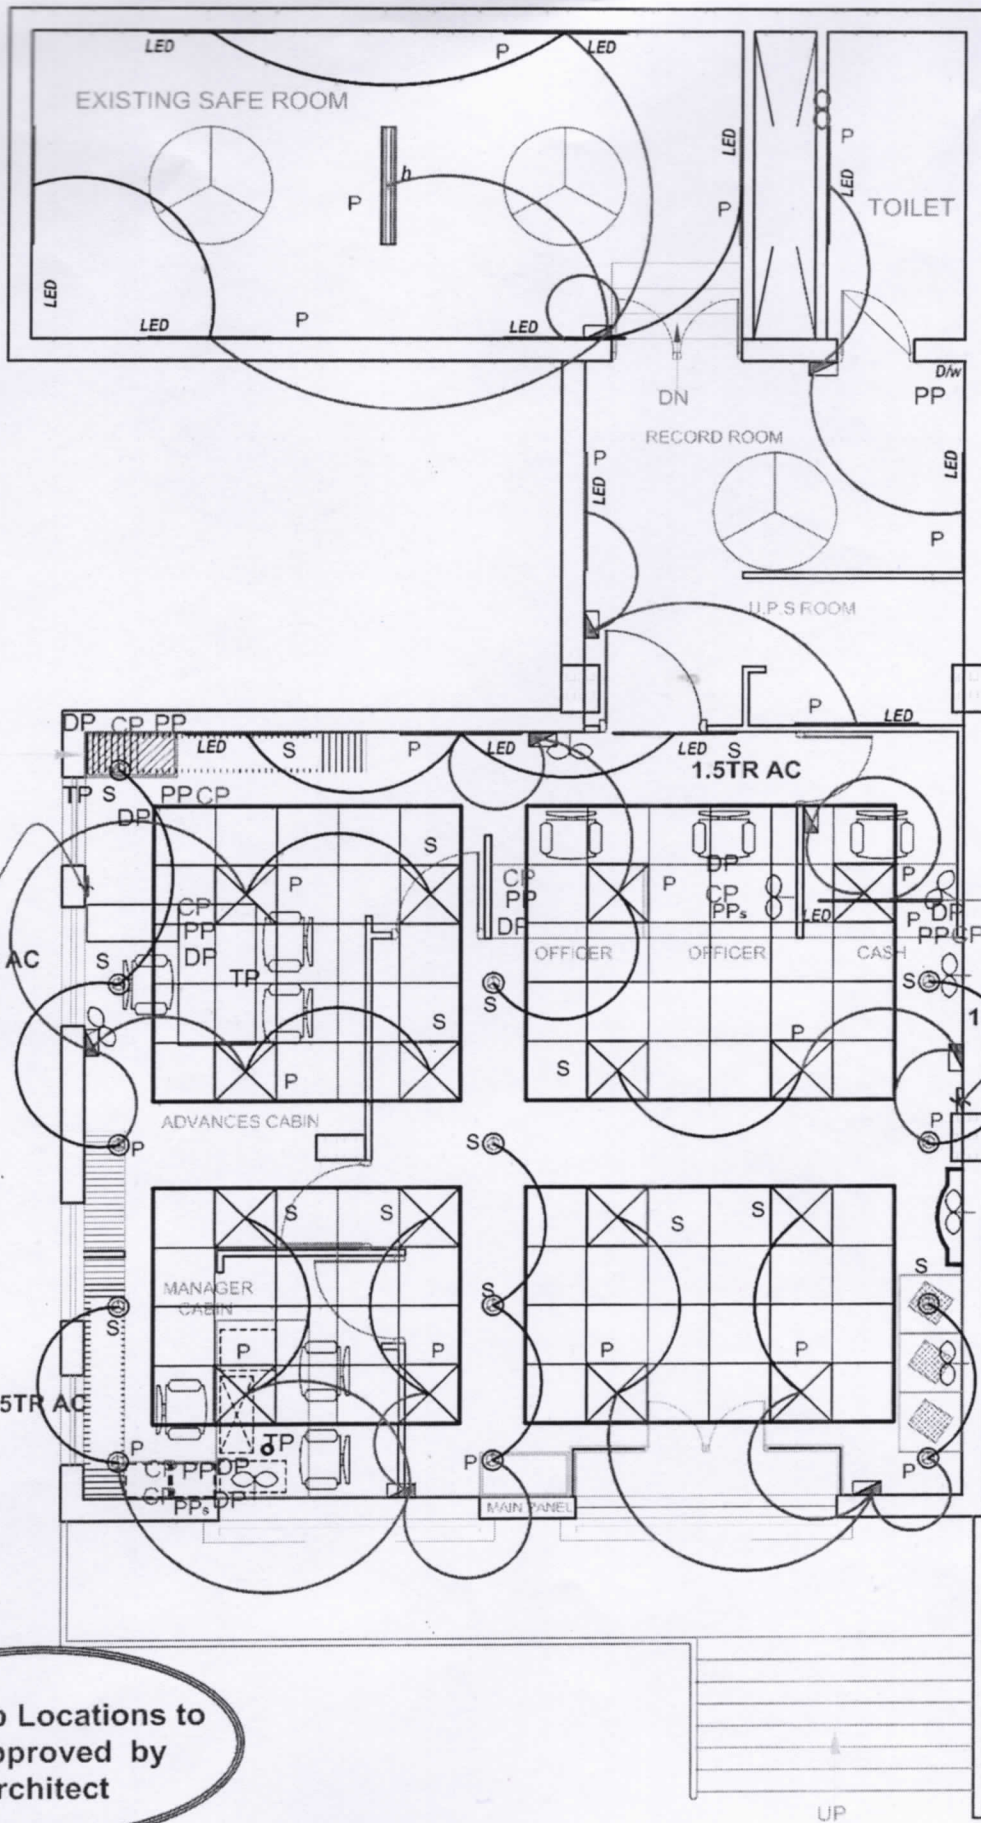

ROUTER AT THE TOP

UPS 12way SPN Db

1.5TR AC

1.5TR AC

1.5TR AC

1.5TR AC

8Way AC, PP & LF VTPN Db

AC & Db Locations to be approved by Architect

DRG. TITLE:-
 FALSE CEILING PLAN
 FOR BARODA U.P. BANK AT
 ANAND NAGAR BRANCH
 REGIONAL ETAWAH

Drg.Title
 UPPER GROUND
 FLOOR

Date
 JULY-2022

North

GUNJAN & ASSOCIATES
 ARCH TECTS ENGINEERS, INTERIOR
 AND LANDSCAPE DESIGNERS
 141, SAINIK NAGAR, LANE NO-9 RAEBARELI ROAD
 LUCKNOW-226002
 Phone: +91 9839016489, 98388 8489
 E-mail:- garun1511@gmail.com, arunan@yahoo.com