



**बड़ौदा यू.पी. बैंक**  
**Baroda U.P. Bank**

**BARODA U.P. BANK**  
**REGIONAL OFFICE AZAMGARH**  
(Sponsored by Bank of Baroda)

**(INTERIOR FURNISHING, ELECTRICAL, DATA CABELING  
VENDORS EMPANELLED WITH  
BARODA U.P. BANK REGIONAL OFFICE, AZAMGARH CAN APPLY)**

**BARODA U.P. BANK**  
**Regional Office AZAMGARH**  
**Damodar Bhawan, Chowk,**  
**Near Bank of Baroda**  
**Azamgarh.**

**TENDER FOR INTERIOR FURNISHING WORK, ELECTRICAL  
DATA CABLING WORKS**

**AT**

**ANJAAN SHAHEED BRANCH**  
**DISTT. AZAMGARH**

**Architects**

**M/s Vision Arch,**  
**V.D.A.Colony, Badalapur,**  
**Varanasi**  
**Ph – 9450165944, 8957906861**  
**8574190784**



बड़ौदा यू.पी.ब  
Baroda U.P. Bank

**BARODA U.P. BANK**  
REGIONAL OFFICE AZAMGARH  
(Sponsored by Bank of Baroda)

**BARODA U.P. BANK**  
Regional Office AZAMGARH  
Damodar Bhawan, Chowk,  
Near Bank of Baroda  
Azamgarh.

Subject: Interior Furnishing, Electrical, Data Cabling works for

Baroda U.P. Bank at ANJAAN SHAHEED Branch,

Distt. AZAMGARH

|                         |                          |
|-------------------------|--------------------------|
| ISSUE OF TENDERS FROM   | 15.09.2022 TO 06.10.2022 |
| LAST DATE OF SUBMISSION | 06.10.2022 up to 5:00 PM |
| TENDER OPENING DATE     | 07.10.2022 TIME 12:00 PM |

TENDERS CAN BE DOWNLOADED FROM THE BANK'S WEBSITE [www.barodaupbank.co.in](http://www.barodaupbank.co.in) OR CAN BE COLLECTED FROM THE FOLLOWING ADDRESS AND SHOULD BE SUBMITTED BY GIVEN DATE AT BARODA U.P. BANK AZAMGARH. (Our Bank Empanelled Furnishing & Electrical Data Cabling Vendors Can Apply)



**बड़ौदा यू.पी. बैंक**  
**Baroda U.P. Bank**

**PLACE OF TENDER COLLECTION / SUBMISSION:**

**BARODA U.P. BANK**  
**Regional Office AZAMGARH**  
**Damodar Bhawan, Chowk,**  
**Near Bank of Baroda**  
**Azamgarh.**

क्षेत्रीय कार्यालय, दामोदर भवन, चौक, आजमगढ़-276001, दूरभाष: 05462-220760  
Regional Office, Damodar Bhawan, Chowk, Azamgarh-276001, Telephone: 05462-220760



बड़ौदा यू.पी.ब.  
Baroda U.P. Bank

## NOTICE FOR INTIMATION TENDER

To,

M/s. \_\_\_\_\_

Dear Sir,

Sub: - Interior Furnishing, Electrical Data Cabling works for Baroda U.P. Bank at  
SARDHA BAZAR- Branch, Distt. Azamgarh

1) Sealed, item rate, tenders are invited in the prescribed format from experienced contractors empanelled for carrying out jobs in AZAMGARH Region for execution of Interior Furnishing, Electrical Data Cabling work for Baroda U.P. Bank at ANJAAN SHAHEED Branch Distt. AZAMGARH. As per following details:

Name of the work : Interior Furnishing, Electrical Data Cabling works  
for Baroda U.P. Bank at ANJAAN SHAHEED Branch  
Dist. Azamgarh

Period of Completion : 4 (FOUR) weeks

Date of Issue of Tender : From 15.09.2022 on any working  
day during Office hours

Last date of submission of Tender : Up to 5.00 p.m. on 06.10.2022 .

Date & Time of opening the Tender : 12.00 p.m. on 07.10.2022



# बड़ौदा यू.पी. बैंक Baroda U.P. Bank

2) The tender document can be downloaded from our bank's website [www.barodaupbank.co.in](http://www.barodaupbank.co.in) or obtained from the Office of the Regional Manager, **Baroda U.P. Bank, Regional Office AZAMGARH Damodar Bhawan, Chowk, Azamgarh 276001.** and should be submitted in original, dully stamped, and sealed in the same office.

3) The item rates under the contract include for full, final & entire completion of all works in all respects described in contract & as shown in drawings forming part of the contract. Contractor must quote item rates for all the items of work. Tenders will be opened in the presence of contracting agencies or their authorized representatives.

4) The tenders shall be submitted in a sealed envelope. The envelope shall be marked as **Technical Bid**, shall contain Volume- 1 of the tender, EMD in the form of Demand Draft / Pay Order and any other matter.

5) The Envelope of the contractors who have complied with the required EMD will be opened on the due date & time of opening.

6) Tenders are to be submitted in a sealed envelope cover super scribed "Tender for Interior Furnishing, Electrical Data cabling work for Baroda U.P. Bank at ANJAAN SHAHEED Branch, Distt. AZAMGARH

7) The tenderer must use only the tender forms issued for the purpose to fill in the rates intimation of tender quoted by letter, telegram / telex will not be acceptable.

8) Tenderers are advised not to make any alternation / modification in the tender documents, item of work or in any respect whatsoever. Violation of this requirement will make the Tender Liable for rejection.

9) In case of postal delivery, the tenderer has to ensure that tender is reached before the due date and time. The bank will not be responsible for damage in the transit and delay of receipt to tender, if any or sent by a special messenger. Tender received late shall be rejected.

10) Every page of the tender documents should be signed by the person or persons submitting the tender in token of his / their having acquainted himself / themselves with the General and Special Conditions of Contract, Specifications etc., as laid down. Any tender with any of the documents not so signed will be subjected to rejection.

11) No consideration will be given to a tender received after the time stipulated above and no extension will be allowed for submission of the tender. The Baroda U.P. Bank shall not be bound to accept the lowest tender and reserves the right to accept or reject any or all the tenders without assigning any reason whatsoever.

12) This notice inviting tenders, the conditions of tender and the duly completed form of tender etc. will form part of the Agreement to be executed by the successful tenderer with the bank.

The following document forming a part of tender are enclosed herewith



बड़ौदा यू.पी. बैंक  
Baroda U.P. Bank

1. Introduction
2. Tender Notice
3. Special Instructions & Conditions
4. Letter of Offer
5. Form of Agreement
6. Preamble to B.O.Q.
7. Mode of Measurement
8. List of Approved Manufacturers for Materials
9. Bill of Quantities

This tender notice shall form part of the contract and non-submission of tender in the above manner will render your offer liable for rejection.

FOR Baroda U.P. Bank



*[Handwritten Signature]*  
REGIONAL MANAGER



**बड़ौदा यू.पी. बैंक**  
**Baroda U.P. Bank**

Terms & Conditions for Vendors:-

1. Advance is not right of Vendor. The rights of advance to Vendor solely rests with Bank.
2. Any request of advance from Vendor will only be entertained if work order is of more than Rs. 10.00 Lakhs
3. Only Vendor having valid & active e-mail id should participate in Tender process.
4. Work order sent via e-mail will be considered accepted if there is no response within 3 days of e-mail sent from Regional/ Circle office.
5. Day to day communication/ instructions will be via e-mail and Vendor should be prompt in replying to every e-mail sent by Regional Office/ Circle office / Architect etc.
6. Quantity of any item can be modified at the time of furnishing as per need of the branch.
7. Vendor has to strictly provide items of make as per list attached on page no 18,19 & 20. Bank reserves the right to cancel the work order without any payment if quality of items are not as per list p



बड़ौदा यू.पी. बैंक  
Baroda U.P. Bank

## TENDER NOTICE

**Subject: Interior Furnishing & Electrical work for Baroda U.P. Bank at ANJAAN SHAAHEED**

**Branch Dist Azamgarh**

**Sealed item rate tenders are invited by M/s Baroda U.P. Bank,  
The REGIONAL HEAD , Baroda U.P. Bank, Regional Office, Damodar Bhawan  
Chowk Azamgarh 276001**

1. The work to be completed within **4 weeks** from 3<sup>rd</sup> days of the date of acceptance of work order placed by **M/s Baroda U.P. Bank**.  
The tenderers are required to complete form of tender, price the schedule of quantities and sign each page of tender documents before submission. The completed set is to be enclosed in a sealed envelope addressed to:

**Regional Head Baroda U.P. Bank , Regional Office, Damodar Bhawan,  
Chowk, Azamgarh 276001.**

2. Tenders will be received up to **06.10.2022** on **17.00 hrs**.
3. No tender will be received after the expiry of the time notified for receiving tenders under any circumstances whatsoever.
4. The tender will be opened at **12.00** hours on **07.10.2022** at above address in the presence of authorized representatives contracting agencies.
5. Tender shall remain valid for acceptance for a period of 90 days from the notified last date of tender submission.
6. The Bank reserves the right to reject any or all tender received without assignment of any reasons thereof.
7. The tender rate against each item of work / price indicated in the schedule of quantities and rates / price should be indicated both in words and figures. In case of any discrepancy, the rates indicated in words would prevail.
8. The rates quoted against each item of work / price should be for the complete finished item of work and include all labour, material, taxes, overhead, duties, etc. Any statutory change in the tax structure after opening of the tender shall be reimbursed by the Bank as per actual.
9. The earnest money deposited shall not carry any interest and will be refunded to the unsuccessful tenderers. Earnest money paid by the successful contractor will be retained by the Bank till completion of the work.
10. Earnest money paid by contractor shall be forfeited by the Bank if contractor fails to undertake the job if he is communicated about acceptance of his rates.

12. All tenders in whom any of the prescribed conditions are not fulfilled or incomplete in any respect are liable to be rejected. This tender notice shall form part of the contract documents.

क्षेत्रीय कार्यालय, दामोदर भवन, चौक, आजमगढ़-276001, दूरभाष: 05462-220760

Regional Office, Damodar Bhawan, Chowk, Azamgarh-276001, Telephone: 05462-220760





**बड़ौदा यू.पी. बैंक**  
**Baroda U.P. Bank**

**GENERAL CONDITIONS OF CONTRACT**

**Subject: Interior Furnishing work for Baroda U.P. Bank at ANJAAN SHAHEED Branch Dist.**

**AZAMGARH.**

*General Instructions to Contractor*

**Inspection of sites:** The contractor shall visit and examine the site and satisfy as to the nature and correct dimensions of work and facilities for obtaining material and shall obtain generally his own information on all matters affecting the execution of work. No extra charge made in consequence of any misunderstanding or incorrect information on any of these points on the ground of insufficient description will be allowed. All expenses incurred by the contractors in connection with obtaining information for submitting this tender including his visit to site and efforts in compiling the tender shall be borne by the tenderer and no claims for reimbursement thereof shall be entertained.

**Safety Regulations:** The contractor shall take all the necessary precautions while working and to safeguard adjacent property, Bank's property, Bank's employees, and traffic persons

**Compliance to local laws:** The contractor shall conform to the provisions of any Act of the Legislature relating to the work and to the Regulation of Bye Laws of any authority. He shall also obtain the permission of the Municipality or any other Authorities if required under the existing rules.

**Site cleaning:** All the rates quoted are inclusive of removal of rubbish / debris collected during the progress of work, rejected material and clearance of site before and after the work is completed. Not more than one truck load shall be stored that to for not more than 3 days. The contractor shall arrange to remove the same immediately. If the contractor is failing to remove the same and the expenses shall be recovered from the contractor and he will not dispute for the expenses so incurred.

**Vouchers / bills:** Contractor shall upon the request of the Bank furnish bills, invoices, accounts, receipts and other vouchers for all materials brought on site to prove that the material purchased are as mentioned in the specification.

**Contractor's responsibility:** The work will from time to time be examined by Project Architect, but such examination shall not in any way exonerate the contractor from the obligation to remedying any defects which may be observed at any stage of the work or after the same is completed.

**Dismissal from work:** The contractor shall upon the written request of the Project Architect immediately dismiss from the work any person employed by him thereon, who may in the opinion of the authority be incompetent or misconduct himself and such person shall not be again employed on the work, without the permission of the bank.

**Order of work, etc.:** Bank reserves the right to fix the order in which the various items of work involved are to be executed. However, the contractor shall be responsible for the completion of the entire job within the item limit specified failing which liquidated damages as mentioned in clause No.49 shall be recovered from the contractor.



बड़ौदा यू.पी. बैंक  
Baroda U.P. Bank

**Commencement of work:** The work must be started within 3<sup>rd</sup> days upon accepting the work order and the programme for carrying out the various jobs shall be drawn out in consultation with the Project Architect. Adequate labour force shall be provided to complete the work within the specified period. Proper security aspects should be taken care of by adequate vigilance in view of the importance of the building. Default in compliance with the programmes so finalized shall entail operation of liquidated damages as stated.

**Subletting the work:** The contractor shall not directly or indirectly sublet the work to other party without written permission from the bank.

**Quantities of works are provisional:** The quantities mentioned in schedule are provisional and likely to increase / decrease to any extent or may be omitted thus altering the aggregate value of the contract. No claim for loss of profit / business shall be entertained on this account.

**Distribution of work:** The Bank reserve the right to distribute the work for which quotation have been called, among more than one parties, if found necessary. No claim in this respect shall be considered and the contractor agrees to cooperate with other agencies appointed by the bank.

**Third party damage:** The contractor shall be responsible for all injury to persons, animals, building, building structure, any damage to road, streets, footpaths and shall rectify it at its own cost.

**Insurance cover:** All the workers of the contractor as well as his sub-contractor must be properly covered by an Insurance Policy under Workman's Compensation Act and Fatal Accidents Act. The contractor at his own expenses arrange to effect and maintain until the virtual completion of the contract, insurance policy in the joint name of the Bank and the contractor against this risk to be retained by the Bank until the virtual completion of the work, and indemnify the Bank from all the liabilities arising out of such events. In case of delay, contractor shall arrange to extend insurance policy till work is completed.

**Delay & Extension of time:** All the work should be completed within the specified period in the tender. If the work is delayed due to the reasons beyond the control of the contractor, he should applying to the Bank explaining, therein the reasons for such delays, immediately and if in the opinion of Bank's authorities the delay is justified, the contractor shall be granted extension in time limit.

**Certificate of virtual completion:** As soon as the work is completed, the contractor shall inform in writing such completion to the PE department Regional office & Project Architect, Ar. Rajesh Kumar who will inspect the work and if satisfied will issue the certificate that the work has been virtually completed and the defects liability period shall commence from the date of such certificate.

**Defect liability period:** The defects or other faults which may appear during the defect liability period which is 12 months after the virtual completion of the work, arising in the opinion of the bank due to inferior quality of material or bad workmanship not in accordance with the contract, contractor shall make good at his own cost within a reasonable time. In case of default, Bank may employ and pay other agencies to amend and make good such defects and all expenses / damages / losses shall be recoverable by Bank or may be deducted from any money due to the contractor

**Arrangement of work:** The contractor shall organize the work in such a way that the office users or the nearby public area put to no hardships and the working of the office is not affected. The contractor shall take adequate care during the progress of work to protect the office property like stationery, furniture, etc. In case of any damage, the same shall be made good by the contractor. Contractor is agreed to work after office hours for which no extra cost shall be considered.

**Stacking of material:** The contractor is not to stack any of his material recklessly so as to endanger the safety of the building and cause any nuisance to the occupants and the public.



# बड़ौदा यू.पी. बैंक Baroda U.P. Bank

**Extra charges:** It must be clearly understood that all the conditions of contracts are intended to be strictly enforced and that no extra charges in respect of extra work will be allowed unless they are clearly outside the spirit and meaning of the condition and unless such work shall have been ordered in writing.

**Protection of material and work:** The contractor shall be responsible for storing and watching his own material and protecting the work at his own cost. The contractor and his worker will be allowed to use lift after office hours. However, no paint drums or heavy bag of cement / paint will be allowed to be taken into the lift. Any damage / spoiling of lift / floor / dado caused during such act will have to be made good by the contractor at his own expenditure.

**Water supply:** The contractor shall make his own arrangement for water required for the work. In case the water is available and supplied by the Bank, the charges for the same shall be recovered at the rate of 1% of value of the work executed. In case water supplied by the Bank, the contractor shall make his own arrangement for the storage, pipeline from point of take off to the required location.

**Electric supply:** The contractor shall make his own arrangement for Electricity required for the work.

**Approval of samples:** The contractor shall furnish well in time before work commence at his own cost, colour samples, samples of material or workmanship that may be called by Project Architect for approval. Rates quoted shall cover for such preliminary work.

**Workmanship:** The work involved calls for a high standard of workmanship combined with speed. All the glass panes, door handles / hinges, electric fitting, fans, furniture records, floors etc. are to be thoroughly cleaned after work is completed. Any damage to the flooring, tiles, dado, paneling or any other part of the building, etc. shall be made good at the cost of the contractor to the entire satisfaction of the Bank. Contractor shall make all arrangements for shifting of furniture / records and keeping the same in its original position after he finishes the work on daily basis. The contractor at his own cost shall provide brown paper, polythene, tarpaulin etc. for protecting furniture / fixtures, paneling, electrical, fittings, records, etc.

**Interpretation of documents / drawing:** Except where otherwise provided in the contract all questions and disputes relating to the meaning of the specifications, design drawings and instructions herein before mentioned and as to the quality of workmanship or materials used for the work or as to any other question, claim, right, matter or thing whatsoever, in any way arising out of or relating to the contract, designs, drawings specifications, estimates, instructions, orders or these conditions or otherwise concerning the works, or the execution or failure to execute the same whether arising during the progress of the work or after the completion or abandonment thereof shall be referred to the competent authority of the Bank whose decision shall be final and binding on the contractor.

**Use of scaffolding:** The contractor shall allow the use of scaffolding erected by them to any other agency employed by the Bank during the contract period without any payment.

**Provisional Item:** If ordered by the Bank, contractor shall be required to carry out provisional items at the same conditions and rates as applicable for this contract.

**Measurements of all concealed items:** Measurements of all concealed items of work and extra item if any, shall be got recorded by the Project Architect before they are checked up.

**Measurements:** All measurement tapes shall be of steel and all scaffolding and ladders that may be



बड़ौदा यू.पी. बैंक  
Baroda U.P. Bank

required for taking measurements shall be supplied by the contractor.

**Cleaning during the work:** The rates quoted shall include cleaning of ceiling roses, electric switches, boards, window panes etc. after the repairing leaving the site neat and tidy from time to time.

**Complying I.S. specification:** Unless otherwise mentioned in the contract, the latest Indian Standard Code for material specifications, method of work, and mode of measurements shall be followed. The payment shall be made on the basis of actual measurement of work done to be submitted along with bill

Rate to include: **The rates quoted by the contractor shall cover for work at any height in the premises for all finished items under this contract. The rate quoted shall be inclusive of all material cost, wastage, labour, loading, profit, taxes if any, scaffolding, transport, supervision, spot light arrangement and any other means to complete the job.** Octroi, sales-tax, works contract tax or any other taxes present or future to be included in the rates so quoted.

**Price Fluctuation:** The rates quoted by the contractor shall be firm throughout the currency of contract (including extension of time if any granted) and will not be subject to any fluctuation due to variation in the cost of material or labour

The successful tenderer if called upon to do so, shall obtain a letter from the approved trade manufacturer whose product is used, if found necessary by the Bank confirming that the manufacturer shall provide all the technical assistance and supervision during the execution of the work at all such places as directed and the contractor shall bear the expenses, if any, for such supervision and technical assistance supplied by the trade manufacturer.

**Testing of materials:** If at any point of time during the work, if Bank authorities desire to carry out the tests of certain materials, the contractor shall arrange for the same and submit the test report without any extra cost to the Bank.

The contractor shall note that they should bring to the notice of the PE department/Architect any breakage in glass window before starting work. However, if any glass window is found to be broken during the repairing work, the same shall be replaced by the contractor at his own cost.

**Conditional tenders:** Conditional tenders are liable to be rejected.

**Rates of non-tendered items:** The successful tenderer is bound to carry out any item of work necessary for the completion of the job even though such items are not included in schedule of quantities.

**Abandonment of work:** If in any case the work required to be abandoned, the contractor shall not be entitled for any claims and he will be paid as per the actual work done till that period.

The Bank reserves the right to accept / reject the lower or any or all tenders in part or in whole without assigning a reason therefor.

Decision of the Bank shall be final and binding on any matter connected with the work. The matter of any dispute shall be decided after mutual discussions based on the terms and conditions of this contract. However, if the matter can not be resolved then the same shall be referred to the respected, qualified person in the field agreed to both the parties and his opinion shall be binding on both the parties. However, this is precourse to any legal action in this regard.

**Incomplete quotation:** Incomplete quotations shall be summarily rejected

**Payments:** The contractor shall be paid by the Bank from time to time under interim payment on



# बड़ौदा यू.पी. बैंक Baroda U.P. Bank

account of works executed and when the value of work equal to the approximate value named in the Appendix as 'Value of work for Interim Certificate' has been executed in accordance with this contract.

When the work has been virtually completed and Bank's Architects / Engineer has certified in writing that the work has been completed on the basis of detailed measurements and has made a final scrutiny and that there is no dispute items, rates, ad quantities, the contractor shall be entitled to the payment of the final bill in accordance with the final certificate which will be honored within the period specified in the Appendix as period of honoring final certificate.

The contractor shall be paid by the Bank within the period named in Appendix (period of honoring certificate) after such certificate has been delivered to the employer by the Project Architect. Project Architect has power to withhold any certificate in the work or any part thereof are not carried out to his satisfaction or the contractor fails to show the desired progress or fails to follow the instructions given or in case of breach of this contract.

For water proofing works on traces, bathroom, WC, Chajja, work has to be executed through the agency specialized in waterproofing. Contractor will have to submit a guarantee of 10 years on stamp papers as per the format to be prescribed by the Bank.

Earnest Money Deposit of successful tenderer shall be treated as security deposit with additional amount required to fulfill requirement of 5% of Tendered Amount (Inclusive of E.M.D.). The contractor should pay this amount to the Bank by DD or PO at the time of submission of tender. This amount shall be retained by the Bank till the work is virtually completed and all amounts relating thereto settled. Second part of security deposit shall be built through the retentions from interim and final bills of the contractor and the amount of retention shall be as stated in the Appendix.

When the certificate of the virtual completion is issued to the contractor the security deposit in the form Security Money shall be refunded, provided that the contractor has fulfilled all the conditions of contract and further provided that the employer has no claim for forfeiture of part or whole of the said deposit. The retention money built up through retention from interim and final bills will be returned to the contractor after the expiry of defect liability period, subject to deductions for any appropriations thereof required to be made by the Bank as per conditions of the contract. The contractor should note that no interest will be allowed on his security deposit. It will be minimum of 5% of Final verified Bill.

The contractor is requested to sign each page of the quotation and put rubber stamp, seal below his signature and seal the quotation in an envelope.

**Liquidated damages:** If the contractor fails to maintain the required progress or to complete the work and clear the site or before the contract or extended date period of completion, he shall without prejudice to any other right, pay as agreed compensation amount of 1 % of contract amount per week of delay subject to maximum of 10 % of contract amount as liquidated damages.

**Records & measurements:** Measurements shall be taken jointly by Project Architect and contractor and shall without extra charges provide assistance with appliance, labour and other things necessary for the work and measurements will be signed and dated by both the parties on completion of measurements.

**Safety measures:** The contractor at his own cost shall provide tarpaulins on the external side of the building at the time of breaking plaster etc. to safeguard adjacent property, Bank's property, employees, traffic, etc. The contractor shall follow all the safety measures while carrying out the work. Employer that is Bank shall not be liable for any compensation due to accident, any mishap or negligence.

If there is delay in commencement of work for any reason, the employer that is Bank shall not be liable for any compensation.

क्षेत्रीय कार्यालय, दामोदर भवन, चौक, आजमगढ़-276001, दूरभाष: 05462-220760

Regional Office, Damodar Bhawan, Chowk, Azamgarh-276001, Telephone: 05462-220760



बड़ौदा यू.पी. बैंक  
Baroda U.P. Bank

If at any point of time during the progress, it is observed that the contractor is not progressing the work with due diligence, care and lagging much behind the schedule or fails to gear up the work despite instructions from Project Architect, the employer (Bank) reserves the right to terminate the contract with 7 days notice. In such case, the contractor shall be liable to pay the employer any extra cost involved for the completion of the said work and will not obstruct any way in completing the work through other agency. After completion of entire work the contractor shall be paid for the actual work executed by him at the quoted rates after deducting any claims, damages. In case of such termination the security deposit held by the Bank will be forfeited.

Although the number of coats of paints / polishing / white washing are specified the contractor will have to additional coats if the surface is not to the satisfaction of the Project Architect and there shall be no extra payment on account of such coats.

**First Aid:** The contractor shall be responsible for all first aid and he shall keep the site fully equipped to meet such emergency.

**Supervision:** The contractor is required to have on site during all working hours a competent supervisor (acceptable to Bank) who will be responsible for the conduct of worker and who has authority to receive and act on such instructions issued by the PE Department/Architect of Bank.

All work shall be carried out in a workman-like manner to the entire satisfaction of the Architect / PE Department.

Contractor shall follow all rules / regulations in force and should possess the license for employing labour and also follow all safety measures, labour bye law and shall be responsible for any lapse.

**Transfer of Tender Documents:** Transfer of tender documents purchased by one intending tenderer to another is not permissible.

**Safety:** The contractor shall carry out the entire work in a workman like manner having full regard for the safety of the men working at site. All safe practices shall be strictly adhered to by the workmen of the contractor like wearing helmets, safety belts when working at heights, gloves when handling sharp objects and reinforcement, eye shields during welding, safety shoes, etc. The contractor shall protect sides of openings in floor slabs, edges of slabs, stairs, stairwells etc. with barricades, warning signs / lights and educate all his workmen regarding following safe working practices. He shall provide first aid boxes at site.

In spite of following safe methods, in case of any unfortunate accident, the contractor shall indemnify the

employer against any expenses or claims towards treatment or compensation.

**A Daily Diary Register:** A daily diary register (with cement and steel stock statement) will be kept in the Engineer's Office or the site office. The contractor or his representative will furnish every day at 9.00 hrs. details of work for the day proceeding and the diary will be written up every day and jointly signed by the Engineer and the Contractor or their representatives in token of its correctness.

**Nuisance:** The contractor shall not any time do cause or permit anyone to do or cause any nuisance on the site or do anything which shall cause unnecessary disturbance of inconvenience to the Employer or to the owners, tenants or occupiers of other properties near the site and to the public generally.



**बड़ौदा यू.पी.बैंक**  
**Baroda U.P. Bank**

**Rights, remedies and powers:**

- 1) Termination of contract due to contractor's default. If the contractor:
  - a. Abandon the contract
  - b. At any time defaults in proceedings with the works with due diligence and continues to do so after a notice in writing of seven days from the Engineer or Project Architect or Employer, or
  - c. Commits default in complying with any of the terms and conditions of the contract and does not remedy it within **3<sup>RD</sup> days** after a notice in writing is given to him in that behalf of the Engineer or Project Architect or Employer.
  - d. Persistently disregards the instructions of the Engineer, Project Architect or contravenes any provision of the contract, or
  - e. Fails to remove materials from the site or to pull down and replace work after receiving from the Engineer, Project Architect notice to the effect that the said materials or works have been rejected.
  - f. Fails to complete the works or items of work on or before the stipulated date (s) of completion, and does not complete them within the period specified in a notice given in writing in that behalf by the Engineer, or Project Architect of Employer, or
  - g. Offer or gives or agrees to give to any person in the Employer's service or to any other person on this behalf, any gift or consideration of any kind as an inducement or reward for doing or forbearing to do so for having done or forborne to do any act in relation to the obtaining or execution of this or any other contract for the Employer, or
  - h. Shall enter into a contract with the Employer in connection with which commission has been paid or agreed to be paid by him or to his knowledge, unless the particulars of any such commission and the terms of payment thereof have previously been disclosed in writing to the Employer / Engineer, or
  - i. Shall obtain a contract with the Employer as a result of ring tendering or other non-bonafide methods of competitive tendency, or
  - j. Being an individual, or if a firm, any partner thereof, shall at any time be adjudged insolvent or have a receiving order or order for administration of his estate made against him or shall take any proceedings for liquidation or composition (other than a voluntary liquidation for the purpose of amalgamation or reconstruction) under any Insolvency Act for the time being in force or make any conveyance or assignment of his effects or composition or arrangement for the benefit of his creditors or support so to do, or any application be made under any Insolvency Act for the time being in force for the sequestration of his estates or if a trust deed be executed by him for benefit of his creditors, or
  - k. Being a company, shall pass a resolution or the court shall make an order for the liquidation of its affairs, or a appointed or circumstances shall arise which entitle the court or debenture holders to appoint a receiver or manager, or
  - l. Shall suffer an execution being levied on his goods and allow it to be continued for a period of 21 days, or

क्षेत्रीय कार्यालय, दामोदर भवन, चौक, आजमगढ़-276001, दूरभाष: 05462-220760

Regional Office, Damodar Bhawan, Chowk, Azamgarh-276001, Telephone: 05462-220760



बड़ौदा यू.पी. बैंक  
Baroda U.P. Bank

- m. Assigns, transfers, sublets (engagement of labour on a piece work basis or of labour with materials not to be incorporated in the work, shall not be deemed to be sub-letting) or attempts to assign, transfer or sub-let the entire works, or any portion thereof without the prior written approval of the employer.
- I) The Bank may, without prejudice to any other right or remedy which shall have accrued or shall accrue thereafter as the Employer by written notice determine the contract either as a whole or in part.
- II) Upon such determination of the contract in whole or in part, the security deposit with the Employer in respect of the contract shall stand forfeited to the Employer without in any way effecting the rights of the Employer.
- III) Rights of the employer after determination of the contract due to contractor's default.
- The Engineer shall on such determination have powers to:
- a. Take possession of the site and any materials equipment, plant, implements stores etc. thereon, and / or
- b. Carry out the incomplete work by any means at the risk and cost of the contractor.
- IV) On determination of the contract in full or in part, the Engineer shall determine what amount, if any, is recoverable from the contractor for completion of the works or part of the works or in case the works or part of the works is not to be completed, the loss or damage suffered by the Employer. In determining the amount, credit shall be given to the contractor for the value of the work executed by him upto the time of cancellation or the value of contractor's materials to be present so as to record the measurements in his presence. If the contractor fails to be present in response to the notice, the recording of measurements shall be proceeded with ex-parte and the measurements as recorded shall be binding the contractor.
- V) The Bank shall have the right to use contractor's plant, machinery and materials on the balance work but shall not in any way be responsible for any damage or loss of the same and the contractor shall not be entitled to any compensation thereof.





**बड़ौदा यू.पी. बैंक**  
**Baroda U.P. Bank**

**APPENDIX TO THE CONTRACT DOCUMENTS**

|   |   |   |
|---|---|---|
| <b>Subject</b>                          | : | <b>Interior Furnishing, Electrical Data Cabling<br/>work for Baroda U.P. Bank<br/>at ANJAAN SHAHEED Branch, Dist- Azamgarh</b>                            |
| 1. Defect liability period              | : | <b>12 months</b> from the date of virtual<br>Completion of work.  |
| 2. Date of commencement                 | : | <b>3<sup>rd</sup> days</b> after the contract is accepted by<br>The contractor  |
| 3. Date of completion                   | : | <b>4 (FOUR) weeks.</b>  |
| 4. Liquidated damages<br>delay          | : | 1% of contract amount per week / day of<br>Subject to maximum of 10% of contract<br>amount<br>For the works of less than 6 month<br>completion<br>Period. |
| 5. Period of honoring final certificate | : | <b>45 days</b>  |
| 6. Period of honouring certificate      | : | <b>15 days</b>  |



बड़ौदा यू.पी. बैंक  
Baroda U.P. Bank

LETTER OF OFFER

To,  
BARODA U.P. BANK  
Regional Office AZAMGARH  
Damodar Bhawan, Chowk,  
Azamgarh 276001

Dear Sir,

**Sub: Interior Furnishing, Electrical Data Cabling works for Baroda U.P. Bank  
at ANJAAN SHAHEED Branch, Distt. AZAMGARH.**

With reference to the tender regarding the above work invited by you, we have to state as under.

We declare that before quoting the rates, we have visited the site and our rates are as per present site condition. In the event of this tender being accepted, I / We agree to enter in to and execute the necessary contract documents as required by you.

As required by you, I / We are returning herewith the documents (in single) duly signed by us at each page in token of our acceptance of the provisions in the documents.

We hereby offer to execute and complete the whole of the works strictly in accordance with the said conditions of contract, special conditions of contract, specifications and drawings at the rates set out against each of the items of work in the schedule of quantities. the total cost included in the above is Rs. \_\_\_\_\_ /- (Rs. \_\_\_\_\_ only).

We have carefully read and clearly understood the conditions of contracts, special conditions of contract, special conditions of contract and specifications. We agree to complete the work at the rate / rates quoted by me / us in the schedule of quantities and within the specified time from the date of work order awarding the work to us.

We understand the work is to be completed within scheduled time period.

Our rates are firm, include and cover all cost, expenses, liabilities of every description and all risk of every kind to be taken in execution and handing over the work to the Bank. The VAT, Service Tax, Sales Tax (State & Central), works contract tax, octroi, duties, municipal tax, general tax and any other taxes applicable and prevailing from time to time on such item for which the same are leviable and the rates quoted by us are inclusive of the same.

Thanking You,

Yours faithfully,

Name :  
Address :  
Tel. No. :  
Mobile No. :

(Fax. No.) :



**बड़ौदा यू.पी. बैंक**  
**Baroda U.P. Bank**

FORM OF AGREEMENT

(On stamp paper of Rs. 100/-)

THIS AGREEMENT made this ..... Day of .....2021..... between Baroda U.P. Bank Regional Office Damodar Bhawan Chowk Azamgarh 276001.( hereinafter called " the owner " ) of one part

and.....  
..... Of or whose registered office is situated at  
.....  
..... ( hereinafter called : " the Contractor " ) of the other part.

WHEREAS the Owner is desirous of

.....  
..... ( hereinafter called " the work " ) at  
.....  
.....

and has caused drawings and Bills of Quantities showing and describing the work to be done to be prepared by or under the direction of

.....  
.....

AND WHEREAS the Contractor supplied the owner with a fully priced copy of the said Bills of Quantities ( which copy hereinafter referred to as " the Contract Bills " ) AND WHEREAS the said drawings ( hereinafter referred to as " the Contract Drawings " ) and The Contract Bills have been signed by on behalf of the parties hereto : AND

WHEREAS the contractor has deposited the sum of

Rupees.....

..... With the owner for due performance of this Agreement.



बड़ौदा यू.पी. बैंक  
Baroda U.P. Bank

NOW IS HEREBY AGREED AS FOLLOWS :

For the consideration hereinafter mentioned the contractor will upon and subject to the conditions annexed carry out and complete the work shown upon the contract drawings and described by or referred to in the Contract Bills in the said conditions.

The Owner will pay the Contractor the sum of Rupees

.....  
..... ( hereinafter referred to as " the Contract Sum " ) or such other sum as shall become payable there under at the times and in the manner specified in the said conditions.

The term " ARCHITECT " in the said conditions shall mean the said **AR. Rajesh Kumar, M/S Vision Arch** in the event of his death or ceasing to be the " ARCHITECT " for the purpose of this contract, such other person as the owner shall nominate for that purpose, not being a person to whom the contractor shall object for reasons considered to be sufficient by employer. Provided always that no person subsequently appointed to be the " ARCHITECT " under this contract shall be entitled to disregard or overrule any certificate or opinion or decision or approval or instruction given or expressed by earlier " ARCHITECT ".

The said conditions there to shall be read and constructed as forming part of this agreement, and the parties hereto shall respectively abide by, submit themselves to the conditions and perform the agreements on their parts respectively in such conditions contained.

Any dispute arising out of the contract shall be referred to Arbitration as per the condition stipulated in clause of " Special condition of contract ".

AS WITNESS the hands of the said parties.

Signed by the said

OWNER

In the presence of witness

NAME:

ADDRESS:

Signed by the said

CONTRACTOR

In the presence of witness

NAME:

ADDRESS

क्षेत्रीय कार्यालय, दामोदर भवन, चौक, आजमगढ़-276001, दूरभाष: 05462-220760  
Regional Office, Damodar Bhawan, Chowk, Azamgarh-276001, Telephone: 05462-220760



बड़ौदा यू.पी. बैंक  
Baroda U.P. Bank

LIST OF FURNISHING MATERIAL

| PARTICULARS               | Make of Material                                    |
|---------------------------|---|
| Plywood/Block Board       | Archid / Century / Green<br>( 6mm, 9mm, 12mm, 19mm) |
| Laminates                 | Greenlam / Century / Archid .<br>(1.0mm thick)      |
| Soft Board (Pin up Board) | Jolly Board, Stylex                                 |
| Gyp Board                 | India Gypsum/Armstrong/Gyproc                       |
| Metal Ceiling             | Armstrong   |
| Vertical Blinds           | Vista, Universal, Maac                              |
| Screws                    | GKW / Mettle fold , Hindalco                        |
| SS Hinges                 | Godrej / Hardwyn                                    |
| Hardware                  | Dorma, Hardwyn, Godrej                              |
| Drawer shutter lock       | Godrej , Link, Dorset                               |
| Ball catch                | Dorma, Hardwyn, Godrej                              |
| Door lock / Handles       | Dorma, Hardwyn, Godrej                              |
| Veneer                    | Archid / Century / Green                            |
| Adhesives                 | Fevicol, Mahacol, Jeeevanjor                        |
| Wood Preservatives        | Black Japan ..                                      |
| Door closure              | Dorma, Hardwyn, Godrej                              |
| Glass                     | Modi / Asahi / Saint Gobain                         |
| Glass tinted              | Same as above.                                      |



बड़ौदा यू.पी.  
Baroda U.P. Bank

|                             |   |
|-----------------------------|---|
| Melamine Polish             | Asian Paint, Nerolac .<br>French . Zinc oxide . |
| Paint                       | Burger, Nerolac, Asain                          |
| AC Grill                    | Air Products, Omicron, Patrawala                |
| Vitrified tiles             | Marbonite Jhonson, Kajaria                      |
| Ceramic Tiles               | Jhonson & Jhonson, Kajaria,                     |
| Alu. Door & Window Sections | Jindal / Bhansail .                             |
| Floor springs               | Dorma, Hardwyn, Godrej                          |
| Cement                      | ACC / Ambuja / Ultratech                        |
| White Cement                | Birla Cement. JK Cement .                       |
| Sun Control film            | Garware ..                                      |
| Stainless steel sink        | Nirali / Diamond ..                             |
| Carpet                      | Modi / Trans Asia/ Unitec                       |
| Rubber foam                 | 34 density mm foam                              |
| WC seat cover               | Jaquor, Cera                                    |
| Toilet paper holder         | Dorma, Hardwyn, Godrej                          |

NOTE : All materials shall confirm to IS / BIS respective numbers.

- Commercial ply shall conform to IS 303.
- Marine Ply shall conform to IS 710
- Block Board shall conform to IS 1659.



# बड़ौदा यू.पी. बैंक Baroda U.P. Bank

## LIST OF APPROVED MANUFACTURERS / SUPPLIERS OF MATERIALS

| MATERIALS   | APPROVED MANUFACTURERS /SUPPLIERS                     |
|---|---|
| S & F / Light fixtures / Patti<br>1x 18 w LED                             | Philips / Wipro / Havells<br>Philips /Wipro / Havells |
| Switch, sockets, conceal box,<br>plate/ Change over switch                | Philips/ Orient / Havells                             |
| MCCB  | L&T / Siemens / Havells                               |
| Bus bar / TPN LDB, TPN MCB / DP<br>MCB / SPN UPDB / MCB &<br>DB/ELCB/RCCB | Siemens / L&T / Havells                               |
| LT Cable / Telephone cable  | Delton / Polycab                                      |
| Light / circuit wiring / Cable ISI /<br>PVC insulated wire ISI            | Havells/ Polycab / Finolex / R.R. Kable / L&T         |
| Floor conduits MMS Grade / PVC<br>conduits & accessories                  | Precision / Wimco / X-press                           |
| Music cum Public address system   | Bosch / Sony  |
| Low Fourteension switch fuse<br>unit with HRC fuse                        | L&T, Siemens  |
| Timer   | Lea grand   |
| Gland Flang type  | Braco   |
| Lugs / Wooden screw   | Dorma, Hardwyn, Godrej                                |
| Telephone tag block   | Krone Box   |
| Wall / Ceiling / Exhaust fans   | Crompton / Usha /Orient                               |
| CAT - 6 Cable / CAT-6 I/O   | D-link / DiGlink                                      |

### Abbreviations:

|         |   |                  |
|---------|---|------------------|
| R.M.T   | : | Running Meter    |
| Sq. Mt. | : | Square Meter     |
| Sq. Ft. | : | Square Foot      |
| Cu. Mt. | : | Cubic Meter      |
| T.W.    | : | Teak Wood        |
| Q.R.O.  | : | Quote Rate Only  |
| C / C   | : | Centre to Centre |
| M.T.    | : | Metric Ton       |
| C.P.    | : | Chrome Plated    |
| NO.     | : | Numbers          |
| MM      | : | Millimeter       |

### PREAMBLE TO BOQ



**बड़ौदा यू.पी.  
Baroda U.P. Bank**

All dimensions are in M.K.S. unless otherwise stated.

1. The quoted rate shall be all inclusive and cover the cost of material including wastage, freight, all types of taxes, duties, royalties, erection, construction, testing of materials if required samples brought for approval, tools and tacks, plant and equipments, supervision, overheads, profit and any other expenditure incurred for completion of work as per drawings, specifications and to the full satisfaction of BANK / Architect.
2. The rates quoted shall be valid for working at all heights, depths and on all floor levels. No extra payment shall be made for scaffolding, staging, ladders etc for transportation of men and materials at higher or lower levels.
3. The item rate specifications are indicative. the contractor will have to carry out the work in accordance with the drawings, technical specifications and / or other conditions laid down in tender document and to the full satisfaction of BANK / Architect.
4. Quantities mentioned against respective items are approximate and can vary to any extent. Payment shall be made on actually executed quantities.
5. No claims shall be entertained in case of increase / decrease quantities of any item and also to add / delete any item in totality. BANK / Architect reserve the right of operating any item for any work.
6. Rates for painting shall include cleaning glass panels, floors etc.
7. After completion of work the site shall be handed over absolutely clean, after ensuring that all floors, walls etc are spotlessly clean.
8. Rates of all items shall remain constant irrespective of floor level and nmo extra shall be paid for handling and stacking of materials, removing debris etc from the site.
9. Unless otherwise noted, the method of measurement will be as per I.S. 1200.
10. BANK / Architect reserve the right of operating all 'Quote Rate only' items.
11. Wherever contractor proposes to use 'equivalent' makes (i.e. other than specified) he shall obtain BANK's prior approval. BANK may ask Architect before giving approval to the same. Any additional cost and time lost due to this will be on Contractor's account and no claims will be entertained.
12. The rate of partition, paneling shall include necessary additional framework supports that may be required to suit site conditions or stability of the item. Decision of Architect in regards to the need for such additional supports shall be final.
13. All wooden frame work/ member size mentioned as out of, shall be full size with maximum planning tolerance of 3 mm both ways.
14. Rates for doors include all brass oxidized heavy duty hardware, locks, floor springs, door springs, door closer, special door handles etc as specified in relative terms.
15. Size and type of door closer/ floor spring shall be suitable for type of door. The contractor shall give guarantee for performance of door closer / floor spring from manufacturer.
16. Rates for partitions, paneling shall include making of necessary cut outs, chasing to be made for conduits, switch boards etc.
17. Rates for painting and polishing shall include cleaning glass panels, fans floor etc.
18. After completion of work the site shall be handed over absolutely clean, after ensuring that all laminates, floors walls etc are spotlessly clean.
19. Contractor shall clean the site and mark the lining out on the floor with adhesive tape for approval. The same shall not be paid separately.
20. In case of loose furniture, the specification for side unit or rear side credenza unit in any item shall be same as the specification of the table in that item.
21. All key hoes should be fixed with metallic key hole ring.
22. Key for all locks should be different and no key should match with two different locks.
23. Rates shall include for following:-

क्षेत्रीय कार्यालय, दामोदर भवन, चौक, आजमगढ़-276001, दूरभाष: 05462-220760

Regional Office, Damodar Bhawan, Chowk, Azamgarh-276001, Telephone: 05462-220760





**बड़ौदा यू.पी.बैंक**  
**Baroda U.P. Bank**

**PLASTERING:**

- Work at all levels, heights and in all situations and profiles.
- Double scaffolding, working platforms / Tarpaulin curtains.
- Coving, drip moulds, grooves, recesses, ornamental bands etc.
- A coat of white wash for neeru plaster soon after curing period is over.
- Work in narrow width and small quantities unless special provision is made to the contrary.
- Preparation of surface by ranking out joints in brick or by hacking the concrete surface and wetting the surface before plastering wherever required.
- Thickness of plaster exclusive of the thickness of key i.e. grooves and open joints in brick work, stone work etc.
- Chambers of any width, internal and external rounded angle.
- Curling, protection and cleaning of all surfaces.
- Keeping all plastered surfaces well wetted for at least 7 days.

**PAINTING & POLISHING:**

- Works at all heights and use of all scaffolding, necessary for execution of work and for inspection.
- Preparing surfaces to receive finishing coats.
- Putting sand papering and dusting of surface in between coats where applicable.
- Work on cornices, narrow bands and widths, grooves etc.
- Finishing to approved matt textures, complete as directed.
- Spreading and removing, covering to doors, windows, floors, fittings etc to protect them from splashes.
- Washing floors, cleaning glass, joinery, electric fittings etc and leaving premises clean and tidy.
- Mode of Measurement

| S.No. | Particulars                  | Method of Measurement                     | Multiplying Factors       |
|-------|------------------------------|---|---------------------------|
| 1     | Panelled doors & Windows     | Measured flat not girthed including frame | 1.125 for each side       |
| 2     | Fully glazed                 |   | 0.5 for each side         |
| 3     | Partly glazed & panelled     |   | 1.0 for each side         |
| 4     | Flush door                   |   | 1.0 for each side         |
| 5     | M.S.Grill & Collapsible door |   | 1.0 for painting all over |
| 6     | Rolling Shutter              | Measured flat not girthed including frame | 1.25 for each side        |

**Mode of Measurements:**

- Partition, Paneling : Sq. Ft. Area - one side only
- Painting : Sq. Ft. Finished area only
- Rounding off Measurements : All measurements shall be rounded off to nearest 2 decimal points.

क्षेत्रीय कार्यालय, दामोदर भवन, चौक, आजमगढ़-276001, दूरभाष: 05462-220760

Regional Office, Damodar Bhawan, Chowk, Azamgarh-276001, Telephone: 05462-220760



बड़ौदा यू.पी.  
Baroda U.P. Bank

Summary

BARODA U.P. BANK

1)

ANJAAN SHAHEED BRANCH DISTT. AZAMGARH

| sno | Description             | Section   | Amount of Tender |
|-----|-------------------------|-----------|------------------|
| 1.  | Furnishing works        | in digits |                  |
|     |                         | in words  |                  |
| 2.  | Electrical & Data works | in Digits |                  |
|     |                         | In words  |                  |
|     | TOTAL                   | in Digits |                  |
|     |                         | In words  |                  |
|     | GST 18%                 | In words  |                  |
|     | GRAND TOTAL             | in Digits |                  |
|     |                         | In words  |                  |

Note :-

1. All materials to be used strictly follow the list of approved materials.
2. Any deviation in the use of materials at site other than approved materials list will not be permitted and the bank may cancel the contract at any time for any such misconduct & colour as per bran manual.
3. The workman ship and quality of work should be of good quality and to be satisfaction level of the bank's architect and bank

Dated: 04-08-2022

**Schedule of Quantity/ Tender of Furnishing work of Baroda U.P. Bank  
Anjan Shaheed Branch Distt. & R.O. Azamgarh**

| S.No. | Item's of work  | Qty   | Unit | Rate | Amount(Rs.) |
|-------|---|-------|------|------|-------------|
| 1.    | <b>Bank Low ht. Counter 2'-6"</b> wide made out of 19mm thick board with drawer unit and front side 12mm thick Etching Glass Supported with Teak wood or Aluminum member With 1.0 mm thick laminate on the top & Drawer unit shall be provided on one side while with space for CPU by its side pull out tray on slide shall be provided on each counter for keeping keyboard. all the exposed edges shall have 6 mm. TW lapping duly polished inside surface shall be enamel painted two coats over primer coats. It shall be locks & handles etc. provision for wire management shall be made. Complete work as per branch Manager/ Architect Satisfaction. | 12.00 | Rft  |      |             |
| 2.    | <b>P/F of Bank Cash counter</b> in partition two level cash counter 5'-0" long (with 3'-10" and 2'-6" height) counter for customer to be 1'-6" wide and counter to be 3'-0" wide with drawer unit made out of 19mm thick board with 1.0 mm thick laminate on top and front and other internal surface to be painted/polished complete as per item no. 1   | 8.7   | Rft  |      |             |
| 3.    | <b>P/F of Cash cabin partition</b> front-over the counter supported on 2"x1-1/2" sal wood frame work cover with 8.0 mm thk. Etching glass supported of 1"x 1/2" beading with book window in size 5"x6" center of the counter with 2"x2" spacing Aluminium grill will be fixed in front of partition Side partition supported 2"x1-1/2" sal wood well seasoned structure with a cost of antitermite treatment up to 3'-0" height framing of inside area with 2"x1-1/2" sal wood section 2'-0"c/c   |       |      |      |             |

(2)

- horizontal and vertical with both side  
6mm thick ply&1.0mm thick laminates  
both side. The upper portion up to 4'-0"  
height shall be of 2'-1/2"x2"x2'-1/2"  
Aluminum grill will be fixed complete  
with all accessories and labour. 210.00 sft
4. P/F of Low Ht.(4'-6'' High) Partly glazed  
Laminated Portion in **Branch Manager/  
Advance dept. Cabin** the Under Framing  
shall be of 2''x2'' sal wood ( Anti termite Treatment)  
for under framing at a max. distance 2'-0'' in each  
direction. 6 mm th. Waterproof Ply shall be fixed on  
two side & 1.0mm thick laminated shall be pasted over  
its with chemical adhesive Provision shall be made  
molding melamine Polished shall be fixed Wherever  
necessary bottom 4'' width shall have 5mm th.  
Plane glass 195.00 sft
25. P/F of Low Ht.(4'-6'' High) Laminated Portion  
for **UPS Space** the Under Framing shall be of  
2''x2''sal wood ( Anti termite Treatment) for under  
frame in at a max. distance 2'-0'' in each direction.  
6 mm th. Waterproof Ply shall be fixed on two side &  
1.0mm thick laminated shall be pasted over its with  
Chemical adhesive 38.00 sft
6. P/F Low height partition/**Wicket gate** all  
specification as item No.4 . 14.00 sft
7. Providing and fixing in position double leaf  
powder coated **Aluminum Entrance door**  
made of 14 guage thick sheet. All member  
shall be of 4''x1-3/4''section and bottom rail  
shall be of 5''x1-3/4''section with 6mm thick  
clear sheet glass including 4''dia 2 Nos. handles  
10''long 2 Nos, Tower bolts, floor spring 2 Nos.  
lock etc. complete. 106.00 sft
8. P/F of **Godrej Night latch.** 2.0 No  
9. P/F of **Godrej mortic lock** 2.0 Nos  
10. P/F of **Door closer I.S.I mark** 3.0 Nos.

(3)

11. Providing and fixing **Writing desk** in position box type Wooden writing in public space of approximate size 4'-0" x 2'-0" made out of 19mm thick good approved quality ply with 6" to 9" wide wide pigeon hole type compartments in the front facade boxing for keeping pay-in-ship, book literature etc. These Writing table's must have laminates 1.0 mm thick on top writing desk and two sides of the Boxes. With beading, lipping, molding and painting /polishing complete. 1.0 No.
12. Suggestion box 1.0 No.
13. Check Drop Box 1.0 No.
14. Providing and fixing **Aluminum grill in cash cabin** Grill Size 2-1/2"x2"x2-1/2" will be fixed complete with all accessories & labour. 49.0 sft
15. Providing and fixing in position **Notice boards** of approximate size 3'-0"x2'-0" and 6" deep made out of 19mm thick ply with fully glazed shutter in front and soft board with felt cloth lining at the back inclusive of good approved quality lock to this shutter, hinges, fixtures, handle etc. and front laminate /painted complete as directed by bank architect. 1.0 No.
16. Providing and placing in position **side units** made out of 19mm board with 1.0mm laminate with sliding hinged shutters (made out of 12mm thick ply with 1.0mm thick laminate on it) complete with handles etc. size 4'-0"x1'-6"x2'-6" 2.0 No.

(4)

17. Providing and fixing **Column/Wall paneling** (8'-6" Height) paneling all specification as per item no.4. 135.0 sft
18. P/F in Position **Branch Manager Table** ( Size-6'-0" x3'-0" ) made out of 19mm th. water proof board with 1.0 mm th. Laminated on all exposed surface (others external surface shall be painted with two coats of enamel paint over one coat of primer) It shall have one unit on one side while provision to be made for pull out tray on slides. the table to be finished in TW/ HW lapping & godrej lock, handles, footrest, latches all complete. 1.0 No.
19. P/F in Position **Officer Table** ( Size-5'-0" x2'-6" ) made out of 19mm th. water proof board with 1.0 mm th. Laminated on all exposed surface (others external surface shall be painted with two coats of enamel paint over one coat of primer) It shall have one unit on one side while . 1.0 No.
20. Providing & fixing wooden **Filling Cabinet** 1'-6" deep to be fixed on the wall frame made out of 19mm thick commercial ply with siding hinge shutters made out of 12mm thick ply with 1.0mm laminate on the front & side other other internal surface to be painted as complete with handle, lock, wall catches etc. 48.00 sft

Total

Rs.-----

(Rs. ----- Lacs ----- Thousand ----- Hundred ----- Only.)

**Detail Tender for Electrical Work LAN Cabling work of Anjan Shaheed  
Branch-Baroda U.P. Bank Ro-Azamgarh**

| Sl.No. | Particulars   | Qty. | Unit | Rate/Unit |    | Amount |    |
|--------|---|------|------|-----------|----|--------|----|
|        |   |      |      | Rs.       | P. | Rs.    | P. |
| 1.     | S/F of plug socket board consisting of 3 plug 5 Amp, three pin, three switch and one indicator with 1.5 sq mm separate circuit wiring for computer .  | 7    | No   |           |    |        |    |
| 2.     | S/F of UPS earthing-S/burying of Dual pipe technology (Pipe in Pipe) earthingelectrode having GI 80mm O/D pipe with 25 micron coating, 3metres long. The space between two pipes to be filled with Highly conductive & Non corrosive chemical compound. The vacant space between pipe & hole shall also be filled with Compound all around. The job also includes S/F of GI strip clamp with two holes (with SS/GI bolts.& nuts) on the electrode& taking two earthing leads of 4mm dia copper wire (Assumed length of 10m -beyond 10m to be paid extra)upto Main panel complete in all respects with guaranteed E/N voltage of less than 2 volts and resistance less tahn 1ohms. The 4mm dia Cu. earth wire shall be terminated on a separate 6way earthlink. The connections for Panel earthing& earth bus in the panle should be taken from this earthlink | 2    | No   |           |    |        |    |
| 3      | S/W 10 Amp, Plug point with 2.5 sq mm copper wire in counter with continuous earthing wire complete in all respect with modular switches /socket.   | 6    | No   |           |    |        |    |
| 4      | S/F of LED Batten 20 watt light Fitting with 1.5 sq mm wiring complete in all respect including modular switches  | 20   | No   |           |    |        |    |
| 5      | S/F of 20 Amp plug point with 2.5 sq mm wiring including modular switches /socket with continuous circuit wiring.   | 6    | No   |           |    |        |    |
| 6      | Providing & Fixing of wall mounted fans (400dia) complete with 1.5 Sq mm wiring and modular switches. The work to include making hole in wall   | 5    | No   |           |    |        |    |

|   |  |    |    |  |  |
|---|--|----|----|--|--|
| 7 | Supplying and Fixing of cabin fans (400Dia) in cash cabin/ in 1.5 sq mm wiring and modular switches. | 1  | No |  |  |
| 8 | Supplying and Fixing of circuit wiring for computer in 2.5 sq mm copper wire.                        | 10 | No |  |  |
| 9 | Supplying and Fixing of wiring for lights and fans 1.5 sq mm copper wire complete in all respect.    | 12 | No |  |  |

| Sl.No. | Items of Work   | Qty. | Unit | Rate/Unit<br>Rs. P. | Amount<br>Rs. P. |
|--------|---|------|------|---------------------|------------------|
| 10     | Supplying and Fixing of exhaust fan in toilet/hall 15 Inch dia 1.5 sq mm wiring and modular switches.   | 2    | No   |                     |                  |
| 11     | S/F of ceiling fan (1200 dia) with hooks in rooms with adding rod of suitable length wherever necessary including 1.5 sq mm wiring and modular switches and regulator | 9    | No   |                     |                  |
| 12     | S & F of 12 way SPN DB double door with 10No SP MCB and 1 no DPMCB 40 AMP for computer  | 2    | No   |                     |                  |
| 13     | Sub main wiring of UPS input and UPS output power supply with 2 no 6 sq mm No. 4 sq mm copper flexible wire in PVC conduit pipe. (payment as/actual length on site)   | 40   | Mtr  |                     |                  |



| Sl.No.             | Items of Work   | Qty. | Unit | Rate/Unit<br>Rs. P. | Amount<br>Rs. P. |
|--------------------|---|------|------|---------------------|------------------|
| 14                 | Supply and fixing on board 3 no KIT<br>KAT cut out 200 amp with neutral link on<br>board  | 1    | Job  |                     |                  |
| 15                 | S/F 63 Amp Changeover   | 1    | No   |                     |                  |
| 16                 | S/F 63 Amp Main Switch  | 1    | No   |                     |                  |
| <b>LAN Cabling</b> |   |      |      |                     |                  |
| 17                 | Supplying and drawing CAT 6 PVC insulated<br>and Sheathed LAN cable through PVC<br>conduit including testing, commissioning<br>etc.as required. | 222  | Mtr  |                     |                  |
| 18                 | Supply and fixing of RJ modem Jack for<br>computer including making connection,<br>soldering etc  | 8    | No   |                     |                  |
| 19                 | Supply and Fixing of Patch Card with CAT 6<br>Jack  | 8    | No   |                     |                  |
|                    |   |      |      | <b>Total Rs.</b>    |                  |

**GRAND TOTAL Rs.-----**

**( Rs. One Lacs Thirty Two Thousand Seven Hundred Twenty Only.)**

**Total Work Furnishing Rs.-----+Total Work Electrical Rs. ....**


**Combined Total Work Furnishing &Electrical Rs.----- ( ----- Lacs ----- Thousand -----  
----- Hundred ----- Only).**

**PROJECT - SPECIFICATION FOR FURNITURE & ELECTRICAL WORKS.****BANK - BARODA U.P. BANK****BRANCH- ANJAN SHAHEED****REGIONAL OFFICE AZAMGARH****\*ALL WORKS TO BE DONE AS PER TENDER CONDITIONS.**

| <b>A</b> | <b>FURNITURE ITEMS</b>  |   |
|----------|---|---|
| 1        | LAMINATES (IS-2046) / VENEER  | GREEN LAM / CENTURY / ARCHID / SAMRAT / FORMICA / SUNDEK OR APPROVED EQUIVALENT   |
| 2        | COMMERCIAL PLY (IS-303) / WATERPROOF PLY (IS-710) / BLOCK BOARD (IS-1659) / FLUSH DOOR (IS- 2202) | ARCHID/ SAMRAT / CENTURY / EURO / GREEN OR APPROVED EQUIVALENT BY EIC.  |
| 3        | ADHESIVES   | FEVICOL / BLUECOAT/ VAMICOAL  |
| 4        | LOCKS   | GODREJ  |
|          | MULTIPURPOSE GROUP LOCK   | E-MPL1-22 / E-MPL1C-22 (EBCO)   |
|          | NIGHT LATCH   | 8812 (GODREJ)   |
|          | CYLINDRICAL LOCK (SS MATT FINISH)   | 3792-WITH KEY AND 3786-KEYLESS (GODREJ) / C120SS (EUROPA)   |
|          | MORTISE DEAD LOCK (TWO WAY)   | 8815(GODREJ)  |
|          | MORTISE LOCK WITH DOOR HANDLE   | MATIZ 8083(GODREJ)  |
| 5        | DRAWER CHANNELS   | GODREJ/ HATTICH/ OZONE  |
|          | TELESCOPIC CHANNELS (ZINK PLATED)   | STDS35(I)35/ STDS25(I)35/ STDS50(I)35/ STDS60(I)35  |
|          | BOTTOM CHANNELS (POWDER COATED)   | BMDS 35/ BMDS 37/ BMDS 55/ BMDS 60 (EBCO)   |
| 6        | GENERAL HARDWARE  | SS MATT FINISH  |
|          | DOOR STOPPER  | I) BLACK/IVORY/BROWN/SILVER COLOR POWDER COATED DS1 (EBCO)<br>II) SPRING TYPE BLACK/BROWN/IVORY COLOR POWDER COATED (ECGL'S STERLING)   |
|          | HINGES  | I) 3"/4"/5"/6" 1.8MM TH. SS MATT FINISH (SUZU)<br>II) 75X12X19 1.2 MM.TH. SS MATT FINISH FOR STORAGE (SUZU)<br>III) AUTO CLOSE HINGES – SLIP ON HINGE- EURO / CLICK ON HINGE-I (EBCO) FOR STORAGE |
|          | HANDLES 'D' OR 'C' TYPE   | 1) 3"/4"/6"10MM DIA SS 202 MATT FINISH (ANJALI)   |
|          | TOWER BOLT  | 3"/4"/6"/8" BRASS EXTRUDED SS MATT FINISH (OSWAL)   |

|          |   |   |
|----------|---|---|
|          | SLIDING CHANNEL   | EBCO MAKE APPROVED BY ARCHITEC/BANK.                                      |
| 7        | FLOOR SPRING  |   |
|          | 60 KG   | 7477 (GODREJ) / M-74 (HARDWYN)  |
|          | 80 KG   | 8293 (GODREJ) / M-74 (HARDWYN)  |
|          | 100 KG  | 8294 (GODREJ) / M-76 (HARDWYN)  |
| 8        | DOOR CLOSER   |   |
|          | 60 KG   | DOUBLE SPEED 8292-SILVER, 7325- GOLDEN (GODREJ) / SCORPIO (HARDWYN)       |
|          | FIRE RATED 60 KG  | 1938 (GODREJ) / TRITON (HARDWYN)  |
| 9        | PATCH FITTINGS FOR DOOR AND FIXED GLASS PARTITION (TOP/BOTTOM PATCH, PIVOT, PATCH LOCK, L ARM, L CONNECT, CONNECTOR, FLOOR SPRING, HANDLE, PLASTIC PROFILE) | GODREJ / XL C SERIES(DORMA) / OPF SERIES (OZONE) OR APPROVED EQUIVALENT   |
| 10       | GLASS / MIRRORS   | SAINT GOBAIN / MODI   |
| 11       | ALUMINUM SECTION  | JINDAL / INDAL / BANCO  |
| 12       | WINDOW BLINDS   | VISTA / AEROLUX/HUNTER DUGLUS / MAC                                       |
| 13       | POLISH / PAINT  | ASIAN PAINTS / BERGER / NEROLAC   |
| 14       | PARTICLE BOARDS   | NOVAPAN / DECO BOARD  |
| 15       | COMPUTER ACCESSORIES  |   |
|          | CPU HANGER/ SHELF   | SIDE MOUNTED IS CPU HL SM (INNOFITT) /CPUSM(EBCO) ,                       |
|          | CABLE MANAGER (60MM)  | I) METAL - CO60ZN1(EBCO)<br>II) PVC - CO 60 (EBCO) BLACK/IVORY/GREY COLOR |
| 16       | ACP PANEL   | TIMEX / ALU DECOR / EURO OR APPROVED EQUIVALENT                           |
| 19       | WHITE FILM FOR GLASS  | CRYSTAL / SONA MAKE VINYL FROSTED FILM                                    |
| <b>B</b> | <b>PAINTS</b>   | ICI, ASIAN,DULUX, BERGER, NEROLAC, JOHONSON & NICOLSAN                    |
| 1        | ANTI CORROSIVE PAINT  | TIKITAR, FINCOAT  |
| 2        | RED OXIDE   | ASIAN, DULUX,NEROLAC  |
| 3        | POLISH  | ASIAN MELAMINE  |
| 4        | EXTERIOR PAINTS   | DULUX WEATHERSHIELD OR APP. EQUIVALENT                                    |
| 5        | ENAMEL PAINT  | ICI, DULUX, ASIAN, NEROLAC  |
| <b>C</b> | <b>FALSE CEILING</b>  |   |
| 1        | GYPSUM BOARD  | GYPROC (SAINT GOBAIN)   |
| 2        | FRAMING WITH COMPLETE SYSTEM  | GYP STEEL ULTRA (SAINT GOBAIN), RAMCO FUJI                                |
| 3        | HILUX BOARDS  | RAMCO OR APPROVED EQUIVALENT  |
| 4        | MINERAL FIBRE TILES CEILING WITH COMPLETE SYSTEM  | ARMSTRONG/SAINT GOBAIN/USG  |


| D  | APPROVE MAKE LIST FOR ELECTRICAL         |   |
|----|--|---|
| 1  | PVC rigid conduits & Accessories:        | 1.5 mm thick ( MMS ) ISI and FIA approved - Precision / Vraj / Nihir / BLP / PFI / Anchor / Polycab make. ( Only white coloured pipes FRLS type to be used. ) |
| 2  | L.T. Cables:                             | Havells / KEI / Polycab / R. R. Kable / Finolex.  |
| 3  | Wires (FRLS):                            | Havells / KEI / Polycab / R. R. Kable / Finolex.  |
| 4  | Main Distribution Boards:                | MDS Legrand (Lexic ) / Hager / Crabtree XPOA / Schneider ( Eazy 9 ) / L & T EXORA / C & S Wintrip / Siemens Bitaguard.  |
| 5  | ELCB / RCCB / Miniature Circuit Breaker: | MDS Legrand (Lexic ) / Hager / Crabtree XPOA / Schneider ( Eazy 9 ) / L & T EXORA / C & S Wintrip / Siemens Bitaguard.  |
| 6  | Switch gears:                            | MDS Legrand (Lexic ) / Hager / Crabtree XPOA / Schneider ( Eazy 9 ) / L & T EXORA / C & S Wintrip / Siemens Bitaguard.  |
| 7  | Change Over Switch:                      | HPL Socomac/ Havells / L & T / Hager.   |
| 8  | Domestic fittings:                       |   |
|    | a) All Switching Modular Accessories.    | MK Wrapped Wround Plus / Schneider Livia / L & T entis / Crabtree Verona / Salzer Elite / Legrand Myris / C & S Divino / SSK Ace.                             |
|    | b) Holders / ceiling roses               | Anchor or equivalent approved make.   |
|    | c) Adhesive Tape                         | Bhor (Steel Grip) or approved .   |
| 9  | 10 - 30 A Polycarbonate Socket & Top:    | MDS Legrand (Lexic ) / Hager / Crabtree XPOA / Schneider ( Eazy 9 ) / L & T EXORA / C & S Wintrip / Siemens Bitaguard.  |
| 10 | Telephone Wires / Cable:                 | Finolex / R. R. Kable / Havells / L & T / Polycab.  |
| 11 | Telephone tag block:                     | Krone make.   |
| 12 | Cable Lugs:                              | Dowell / Lotus / Jainson / 3 D.   |
| 13 | Cable gland Single / Double Compression: | HMI / Comet / 3D.   |
| 14 | Ammeter / Voltmeter:                     | AE / HPL / MECO/ Enercon make.  |
| 15 | Selector switches:                       | L & T salzer / Kaycee make.   |
| 16 | Indicator lamps:                         | LED type Teknic / Precifine/ Binay.   |
| 17 | Connector strips:                        | Wago / Elmex make.  |
| 18 | Lighting Fixtures :                      | Wipro / Philips / GE / Crompton. only   |
| 19 | Exhaust fan (Light duty):                | Khaitan / Crompton / Havells.   |
| 20 | Ceiling Fan ( 5 star rated ):            | Crompton ( High Breeze Plus ) / Havells.  |
| 21 | Wall mounted Fan ( 5 star rated ):       | Crompton ( High Flow Wave) / Havells.   |
| 22 | Data Cable - I / O Unit:                 | D - Link / Digi Link.   |

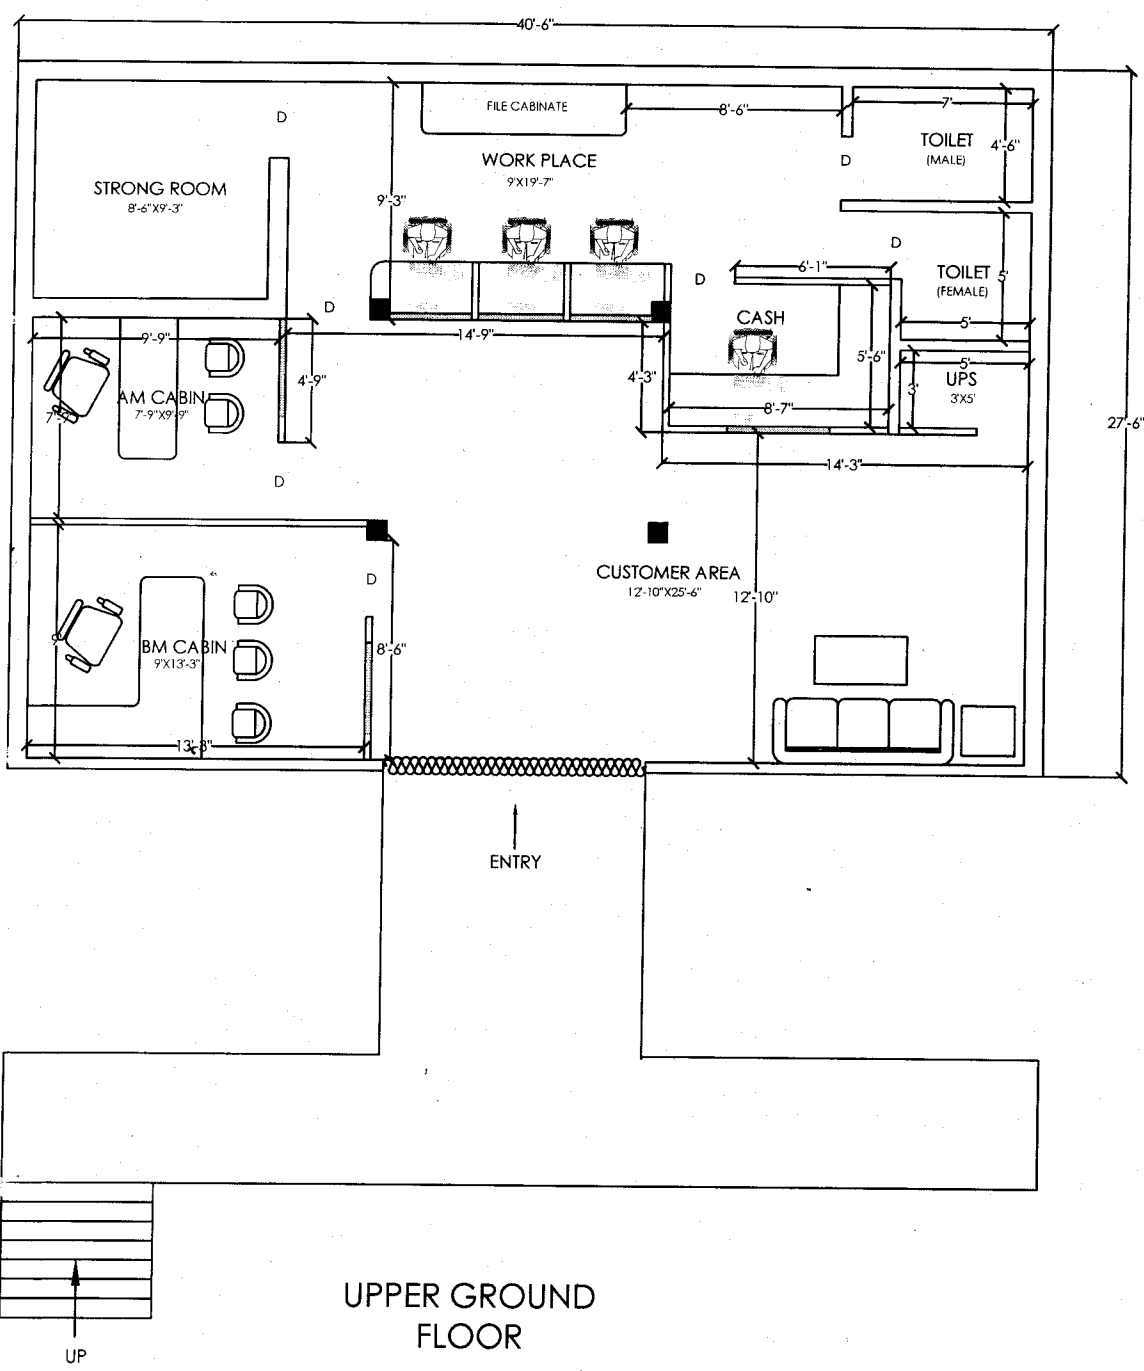

**PROPOSED PLAN - BARODA UP. BANK**

BRANCH - ANJAN SHAHEEB  
 DISTRICT - AZAMGHARH

DWG TITLE - FIRST FLOOR PLAN  
**PLAN**



**Ar. RAJESH KUMAR SINGH**  
 ( B.ARCH )

VISION ARCH  
 PLOT No. - A-166  
 VDA COLONY , BARALALPUR  
 VARANASI  
 MOB. NO.- 9450165944  
 EMAIL ID - VARCH0036@GMAIL.COM