

RO/PRAY/P&E/2022-23/50

Date:- 19.12.2022

**TENDER FOR FURNISHING OF MISHIRPUR BRANCH**

Baroda UP Bank Regional Office Allahabad, 3 D Tashkant Marg Civil Line, invites sealed tender for furnishing for our **Mishirpur** branch (Dist- Prayagraj) from the empanelled Furnishers of Baroda UP Bank, Head Office, Buddh Vihar Taramandal Gorakhpur-273016 (U.P).

1. Tender issuing date : 19.12.2022
2. Last date for submission of tender : 03.01.2022 at 4:00 PM
3. Date of opening of tender : 03.01.2022 at 5:00 PM
4. Contact Number : 9793138316
5. Tender to be address to : **The Regional Head**  
**Baroda UP Bank,**  
**Regional Office- Prayagraj, 3D Tashkant Marg Civil Line,**  
**211001**

**Terms and condition of tender:**

- Ø Rates should be quoted on the space provided in **annexure attached only**. No other sheet/form should be used for quoting rates.
- Ø The competent authority (bank) does not bind themselves to accept the lowest or to give any reasons for its decision of acceptance or rejection of tenders.
- Ø Incomplete in any respect or conditional tender shall liable to be rejected.
- Ø Rates quoted only by bank's empanelled vendors will be consider/accepted.

**Other conditions:**

- Ø The registration number of the firm along with **GST no.** allotted by the authorities must be submitted.
- Ø **PAN NUMBER** of the firm allotted by the income tax authorities should be submitted (without which the vendor's bid would become invalid and shall be liable to reject)
- Ø Conditional tenders shall not be accepted on any ground and shall be rejected straight.
- Ø Any deviation of the conditions given by the purchaser will not be accepted and bid will be rejected without assigning any reasons.
- Ø If any clarification is required the same should be obtained before submitting the bid.
- Ø The entire document must be signed with the seal and attached as mark of acceptance of terms and condition.

Regional Office : 3 D Tashkant Marg Civil Line Allahabad 211001 (U.P.)  
E-mail: roalla@barodauprrb.co.in; Fax-0532-2407653 Mo.7311121755,7311121764,

*[Handwritten signature]*

- Ø BUPB reserve the right to accept or reject any bid whole or in parts without assigning any reason thereof.
- Ø Bank's decision will be final and no correspondence will be entertained in this regard.
- Ø In case of delays in submission/non submission of bids ,Bank will not assume any responsibility.
- Ø Bank may reject any or all quotations without assigning any reason.

**Tender submission:**

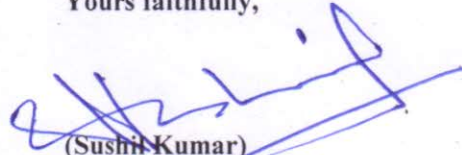
Submission of tenders in sealed envelope super scribing "TENDER OF FURNISHING OF MISHIRPUR BRANCH" addressed to "The Regional Manager Baroda UP Bank, Regional Office- Prayagraj, 3D Tashkant Marg Civil Line; 211001", Complete in all respect latest by **4.00 PM dated- 03.01.2022** Tenders received after that shall not be entertained.

Tender must be submitted through hand to hand or through registered post.

**Evaluation of tender:**

Quoting incredibly low value of items with a view of subverting the tender process shall be rejected straight away.

Yours faithfully,

  
(Sushil Kumar)  
Regional Head  
Prayagraj - Region

Bharat and Associates.  
Architects, Engineers, Interiors &  
Landscape Designers,  
Shop no-1, First Floor, Jeevan Plaza  
Viram Khand-5, Gomti Nagar, Lucknow-226010  
E-Mail: bharatandassociateslko@gmail.com

**PROJECT - BOQ FOR FURNISHING WORKS.**

**BANK - BARODA UP BANK**

**BRANCH - MISHIRPUR**

**REGIONAL OFFICE PRAYAGRAJ**

**\*ALL ITEM TO EXCLUSIVE OF TAXES . Taxes to Mentioned By the Contractor.**

**\*ALL WORKS TO BE DONE AS PER TENDER CONDITIONS.**

**Laminate use only-Century, Green, Archid, Sunmica Aica (Other Laminate is not Acceptable)**

S.NO	DESCRIPTION OF ITEM	QUANTIT	UNIT	RATE (Rs.)	AMOUNT (Rs.)
<b>A.</b>	<b>FURNISHING WORKS</b>				
<b>1</b>	<b>Aluminum Section Door with Glass</b> Aluminum entrance door with partition made of aluminum section of Hindalco/ Jindal 1.75"x1.75" and 1.5 m with 5mm thick glass with door made of door section 1.75" x 1.75" and door bottom 4.5"x1.75" (114mmx44mm) with 5mm glass complete with lock, door closures, tower bolt and handles etc.	130	SQFT		
<b>2</b>	<b>Low /Full Height Wooden Partitions (partly glazed) and Flap Doors</b> Providing and fixing of low height glazed Partition considered and above necessary ceiling supports to be provided) with Anodized Aluminium frame work, heavy sections (2mm thickness) of 2"x1.5" section, spacing of 2'0"x2'0" on both sides and covered with 9mm thick BWR plywood finished with 1mm thick laminate of skirting & borders on both sides with necessary Pedilite SH adhesive, screws and bolts, etc; & above 8mm thk float glass with aproved quality and pattern frosted film, as per design Glass panel to be fixed with 19 X 32.5 mm teakwood beading around. Glass to be butt jointed and edges to be ground/machine polished to get a flush joint complete as directed and sealed with silicone sealent. Framework of partition is to be fixed to RC ceiling for support. All surfaces shall be treated with antitermite wood preservatives before covering up complete as per directions and approval.				
	The job shall also include for provision of laying conduits, switch boxes etc. The erection of partition shall include for expansion bolts cleats, clamps bolts, nuts, screws, rivets and other accessories, all complete up to the satisfaction of the Architect.				
	All door opening shall have rebated teak wood framework (size - 75mm x 50mm, as per profile) on vertical (2 Nos.) and horizontal (1 No.) sides, with melamine finish and rebate of 40mm x 12mm, all complete up to the satisfaction of the Architect.				

	the partition and doors shall have hinges floor springs/sliding arrangement/hydraulic door closer, mortise locks (Godrej make all), etc. The rate shall include cost of all materials, labour, T&P, wastages, etc. required for proper completion of work, all complete to the satisfaction of the Architect.	290.00	Sq.Ft		
	Partition to have 1.00 mm high Laminates at skirting on both sides of partition.				
3	CASH CABIN PARTITION(HT-7' ONLY)				
	Providing and fixing of wooden partitions made out of 2"x1-1/2" Aluminium frame work under framing for horizontal (at 0mm, 75mm, 750mm, 900mm, 1200mm, 2100mm and 2550mm and ceiling levels) & vertical (at 600mm c/c approx.) divisions or as per site conditions. It shall be covered with 9mm thick water proof ply with 1mm thick laminate, (from 0mm to 1200mm and 2100mm to 2550 mm/ceiling levels) on both sides. The design shall have 6mm x 4mm grooves (horizontal or vertical) at various levels, as suggested by the Architect				
	It shall have decorative aluminium grill (from 1200mm to 2100mm) fixed with teak wood beading (size - 30mm x 20mm, as per profile) with melamine finish. The job shall also include for provision of laying conduits, switch boxes etc. The erection of partition shall include for expansion bolts cleats, clamps bolts, nuts, screws, rivets and other accessories, all complete up to the satisfaction of the Architect.All door opening shall have rebated teak wood framework (size - 75mm x 50mm, as per profile) on vertical (2 Nos.)				
	and horizontal (1 No.) sides, with melamine finish and rebate of 40mm x 12mm, all complete up to the satisfaction of the Architect.It shall also include for door shutters, as per required width and 2100mm high. It shall be made out of 75mm x 25mm, kail/partal wood (with anti-termite) under framing for styles, top, middle and 100mm x 25mm for bottom rail. It shall be covered with 6mm thick water proof ply with 1mm thick laminate, (from 0mm to 900mm and other under frames) in shade and pattern approved by the Architect, on both sides.				
	The design shall have 6mm x 4mm grooves (horizontal or vertical) at various levels, as suggested by the Architect. It shall also have aluminium grill (from 900mm to 2025mm) fixed with teak wood beading (size - 20mm x 20mm, as per profile) with melamine finish. Door shutters shall have teak wood edging (size - 40mm x 10mm, as per profile) on all sides, with melamine finish. Each shutter shall have hinges floor springs/sliding arrangement/hydraulic door closer (heavy duty), mortise locks, etc. The rate shall include cost of all materials, labour, T&P, wastages, etc. required for proper completion of work, all complete to the satisfaction of the Architect.	160.00	Sq.Ft		
4	Glass Barrier on cash cabin and front glass for counter(12 MM NECESSARY)	45.00	Sq.Ft		



